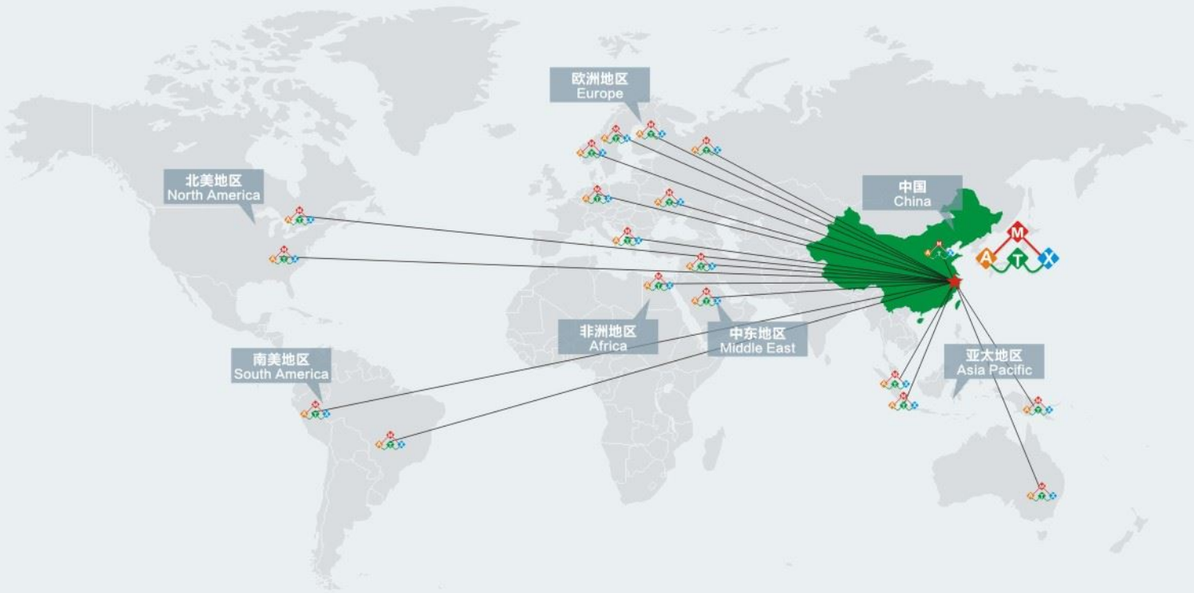



宁波迈科思电子科技有限公司
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD

地址：浙江省慈溪市逍林镇樟新北路476号
邮编：315321
电话：0574-63505128
传真：0575-63532183
邮箱：sales@nbmax.com.cn
网址：www.nbmax.com.cn

ADD：NO.476,ZhangXin North Road, XiaoLin Town,
CiXi City, NingBo, ZheJiang Province, China
P.C.: 315321
TEL: 86-574-63505128
FAX: 86-574-63532183
E-mail: sales@nbmax.com.cn
Http://www.nbmax.com.cn

ISO9001 ISO14001 cULus CE VDE TÜV CQC CB RoHS SGS REACH

迈科思电子科技
MKX ELECTRONIC TECHNOLOGY

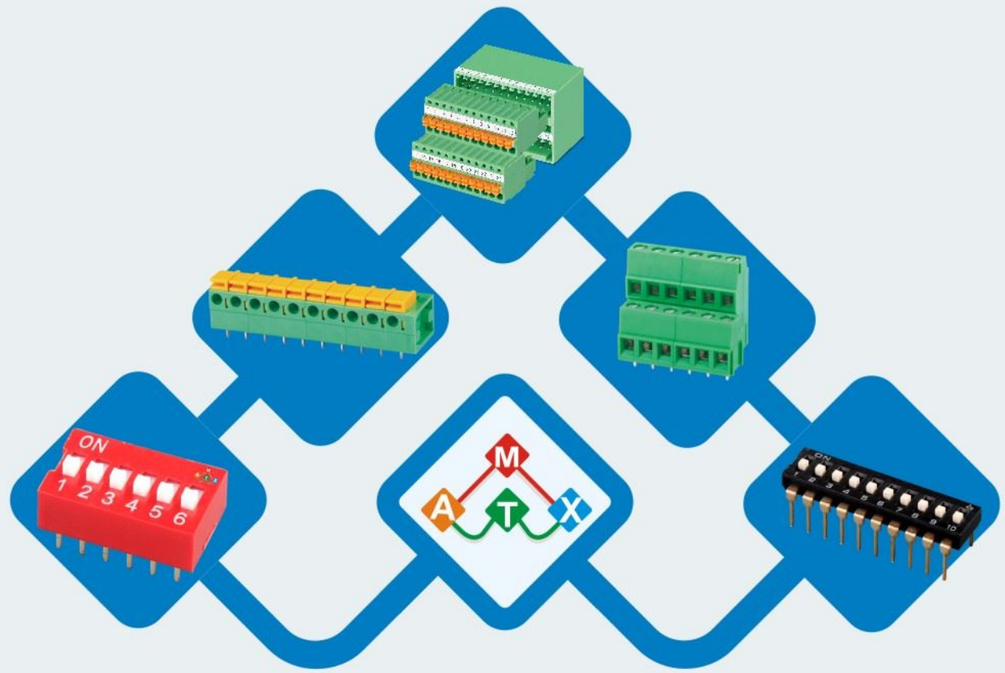

TERMINAL BLOCKS

宁波迈科思电子科技有限公司
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD

RoHS Compliant
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD

迈科思电子科技
MKX ELECTRONIC TECHNOLOGY

公司简介

COMPANY PROFILE

宁波迈科思电子科技有限公司成立于2012年，是一家专业的电子接插件研发，生产和销售于一体的现代化企业，现有员工200人，公司产品涵盖了：接线端子，DIP开关，欧式插座，排针，排母等近千个品种。公司在多年的发展过程中，逐步建立了：研发中心，模具制造，精密冲压，精密注塑，五金切削，流水线装配，自动化设备等部门，公司运用先进的生产设备和一流的管理团队，不断提高生产效率，完善产品质量，优化服务团队，“专心，专业，诚信，执着”的企业理念贯穿于公司的每个细节，公司通过了ISO9001-2008的质量管理体系认证，产品严格贯彻执行行业和国家技术标准，并先后通过CE、TUV、UL、VDE等国际标准认证，质量管理和国际接轨，目前产品已经在中国，美国，俄罗斯，德国，西班牙，意大利，法国，等30多个国家和地区广泛使用,深得客户信任。宁波迈科思电子科技有限公司的全体员工将一如既往的为全世界的客户提供最好的产品，最优的服务，我们愿和广大客户一起：携手共进，共创美好明天！

Founded on 2012, Ningbo MKX Electronic Technology CO.,LTD is a professional Manufacture for Electronic Connectors,now we employed 200 workers,the main products of us are :Terminal blocks,Dip Switches,Din41612 Connectors,Pin Header ,Female Header...,There are nearly thousands of products which widely used in frequency converters, the control of servo drives, switching power supply, electric lighting and industry automation etc.,as developed for our factory,we make the research and development center,Workshops for Moulds,Punching,Injection,precise cutting,Assembling,Automatic Machines,we always keep “ Attentive ,Professional , Credibility,and Persistence” is together with the factory,We have got ISO9001:2008 international quality system certificate,and all the products we keep then fit the standard of china and intentional,now we have got the certification of CE,TUV,UL, VDE,our products sells well in China, The USA ,Russia,Germany,Spain,Italy,France... more than 30 countries.All the members of NINGBO MKX will work hard everyday, give our customer: best quality products,and best service,we will work together ,develop together with our customers,we are sure we will have a very good future.

宁波迈科思电子科技有限公司
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD





公司前台
Company Front Desk



办公室一角
Corner Of The Office









工作车间
WORK SHOP

迈科思电子科技
MKX ELECTRONIC TECHNOLOGY

TEST EQUIPMENT
检测设备

















产品目录

CONTENTS
MKX TERMINAL BLOCK

第一章 PART1

插拔式接线端子

PLUGGABLE TERMINAL BLOCK

第二章 PART2

螺钉式接线端子

PCB SCREW TERMINAL BLOCK

第三章 PART3

弹簧式接线端子

SCREWLESS TERMINAL BLOCK

第四章 PART4

贯通式接线端子

FEED THROUGH TERMINAL BLOCK

第五章 PART5

栅栏式接线端子

BARRIER TERMINAL BLOCK

第六章 PART6

拨码开关

DIP SWITCH

MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS


Pitch: 2.50mm

MX15EDGKD-2.50



Ordering information

订购方式/HOW TO ORDER

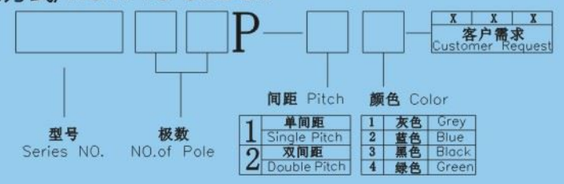


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	125V	130V
Rated Current:	4A	5A
Wire range	28-20AWG/0.5mm2	
Withstanding voltage	AC1250V/1Min	
Mechanical		
Torque:	0.1Nm(0.9Lb-In.)	
Strip length:	7-8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:		
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	2.50mm(.138″)	
Poles available:	2P-24P	

Dimensions


(Dimensions in mm)

N=No.of contacts

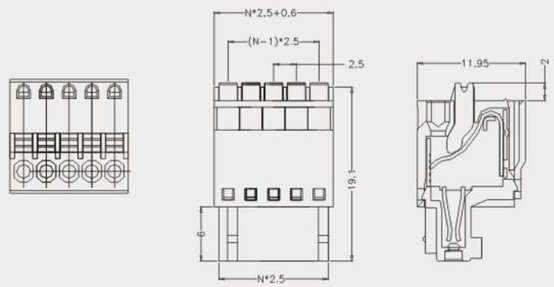


Pitch: 2.54mm

MX15EDGK-2.54



Ordering information

订购方式/HOW TO ORDER

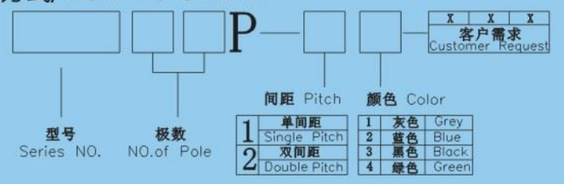


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	125V	130V
Rated Current:	4A	5A
Wire range	28-20AWG/0.5mm2	
Withstanding voltage	AC1250V/1Min	
Mechanical		
Torque:	0.1Nm(0.9Lb-In.)	
Strip length:	7-8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M1.5 Steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	2.54mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 2.50/2.54mm

MX15EDGCV-2.5/2.54




MX15EDGCR-2.5/2.54



Ordering information

订购方式/HOW TO ORDER

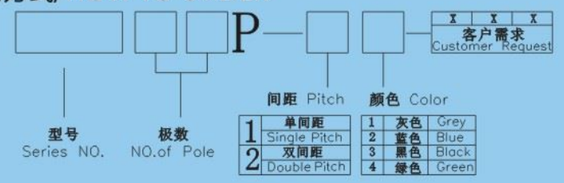


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	125V	130V
Rated Current:	4A	5A
Withstanding voltage	AC1250V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	2.50mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 3.5/3.81mm

MX15EDGKM-3.50/3.81




MX15EDGK-3.50/3.81



Ordering information

订购方式/HOW TO ORDER

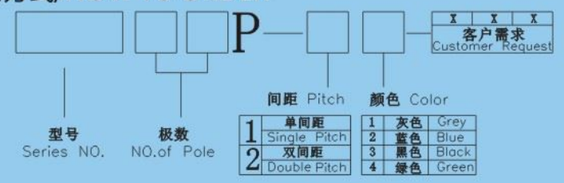


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Wire range	28-16AWG/0.5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M2 Steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(.138″) 3.81mm(.150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGKAM-3.5/3.81




MX15EDGKA-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

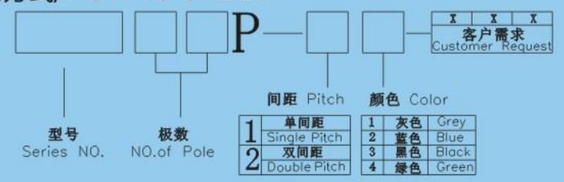


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Wire range	28-16AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0. 2Nm(1.7Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M2.0 Steel,Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(. 138″)3.81mm(. 150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGKBM-3.5/3.81




MX15EDGKB-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

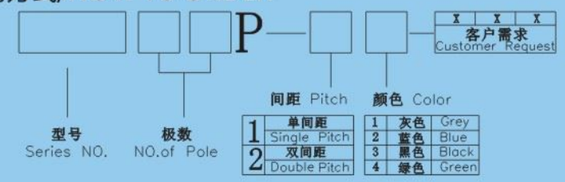


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Wire range	28-16AWG/0. 5-1.5mm2 28-16AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0. 2Nm(1. 7Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M2 Steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(. 138″)3.81mm(. 150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGKDM-3.5/3.81




MX15EDGKD-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

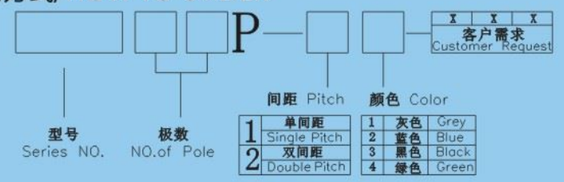


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	12A
Wire range	28-16AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:		
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(. 138″)3.81mm(. 150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGRC-3.5/3.81




MX15EDGRCM-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

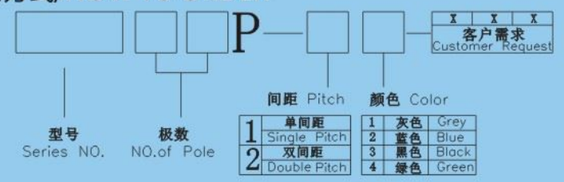


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5mm(. 138″)3.81mm(. 150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGVC-3.5/3.81




MX15EDGVCM-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

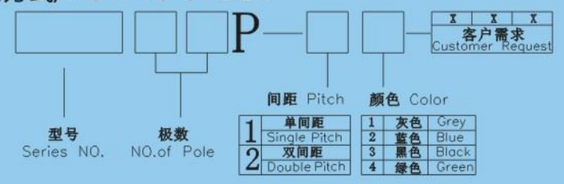


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5mm(.138″)3.81mm(.150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 3.5/3.81mm

MX15EDGVT-3.5/3.81




MX15EDGVTM-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

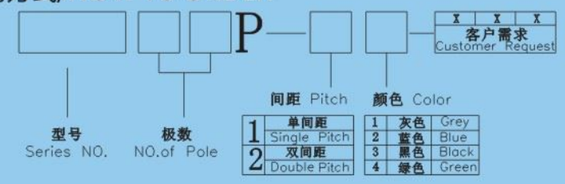


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC1500V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5/3.81mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGRH-3.5/3.81



MX15EDGRHM-3.5/3.81



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5/3.81mm(.138″)	
Poles available:	2*(2-24)P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGVH-3.5/3.81



MX15EDGVHM-3.5/3.81



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5/3.81mm(.138″)	
Poles available:	2*(2-24)P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.5/3.81mm

MX15EDGB-3.5/3.81




MX15EDGA-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

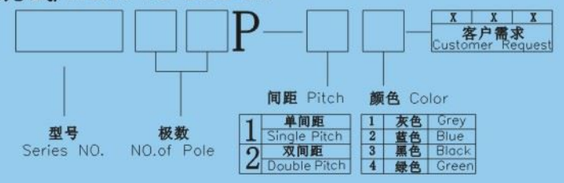



SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.5/3.81mm(.138″)	
Poles available:	2*(2-24)P	

Dimensions

(Dimensions in mm)






N=No.of contacts

Pitch: 5.0/5.08mm

MX2EDGKM-5.0/5.08




MX2EDGK-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

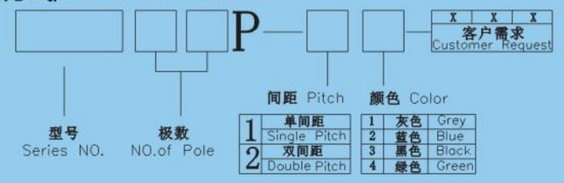



SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Wire range	24-12AWG/0.2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(.197″) 5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)





N=No.of contacts

MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGKDM-5.0/5.08




MX2EDGKD-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

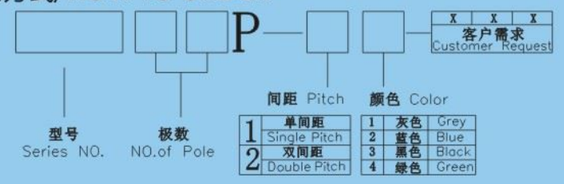


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A 20A	
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	10mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:		
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(.197″) 5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.0/5.08mm

MX2EDGKAM-5.0/5.08




MX2EDGKA-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

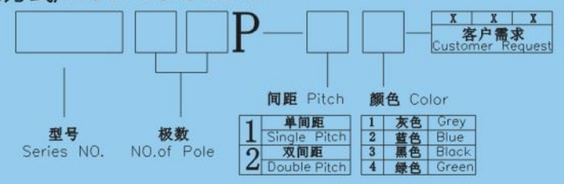


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A 18A	
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(.197″) 5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGKBM-5.0/5.08




MX2EDGKB-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

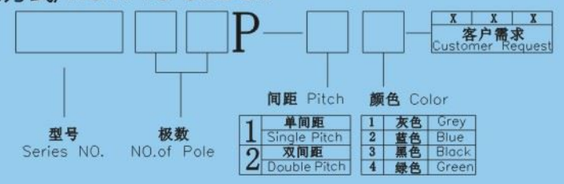


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	18A
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 Steel,Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(. 197″) 5.08mm(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






Pitch: 5.0/5.08mm

MX2EDGRCM-5.0/5.08




MX2EDGRC-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

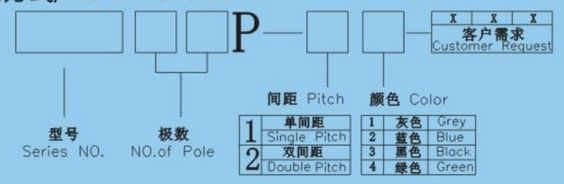


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0mm(. 197″) 5.08mm(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGVCM-5.0/5.08




MX2EDGVC-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

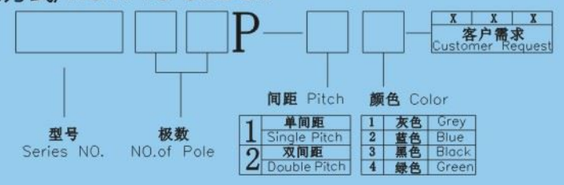


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0mm(.197″)5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGR-5.0/5.08



MX2EDGV-5.0/5.08



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0mm(.197″)5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGRH-5.0/5.08




MX2EDGRHM-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

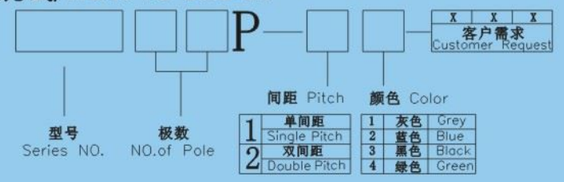


SPECIFICATION


Certification	cULus	IEC
Standard	cULus	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	10A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0mm(.197″)5.08mm(.200″)	
Poles available:	2*(2-24)P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.0/5.08mm

MX2EDGVH-5.0/5.08




MX2EDGVHM-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

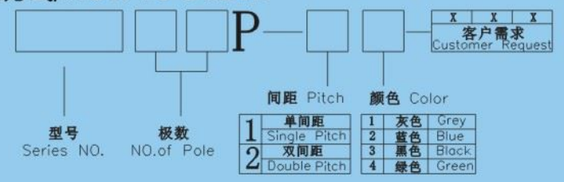


SPECIFICATION


Certification	cULus	
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	10A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0/5.08mm(.138″)	
Poles available:	2*(2-24)P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGB-5.0/5.08




MX2EDGA-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

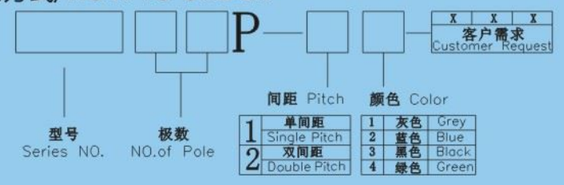


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0/5.08mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.0/5.08mm

MX2EDCA-5.08



MX2EDGL-5.0/5.08



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0/5.08mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX2EDGLC-5.0/5.08



MX2EDGLM-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

□ □ □P— □ □ — X X X 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.0/5.08mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.08mm

MXHT508-5.08



Ordering information

订购方式/HOW TO ORDER

□ □ □P— □ □ — X X X 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	12A	20A
Wire range	28-12AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7-8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.08mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 5.08mm

MXHT508V-5.08




MXHT5.08R-5.08



Ordering information

订购方式/HOW TO ORDER

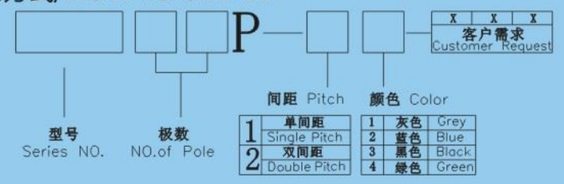



SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	12A	20A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	5.08mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)





N=No.of contacts


Pitch: 3.96mm

MXHT396-3.96



Ordering information

订购方式/HOW TO ORDER

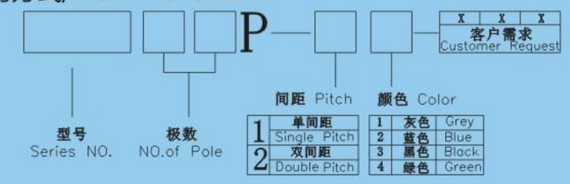


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A	15A
Wire range	28-14AWG/0.5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.2Nm(3.5Lb-In.)	
Strip length:	7-8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M2 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.96mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

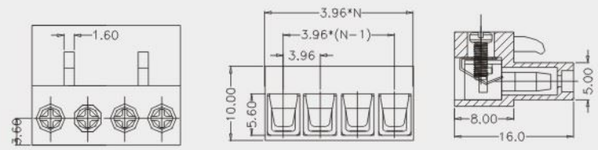

N=No.of contacts

PLUGGABLE TERMINAL BLOCKS

MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 3.96mm

MXHT396V-3.96




MXHT396R-3.96



Ordering information

订购方式/HOW TO ORDER

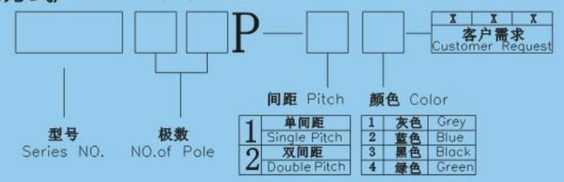


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A	15A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	3.96mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.08mm

MX2EDGKR-5.08




MX2EDGKRM-5.08



Ordering information

订购方式/HOW TO ORDER

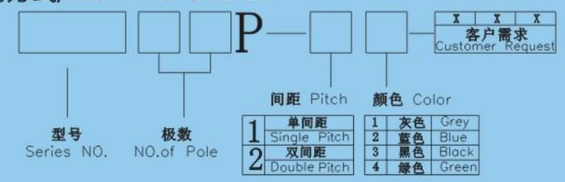


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.08mm(.200″)	
Poles available:	2P-24P	


Dimensions

(Dimensions in mm)

N=No.of contacts







MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 7.5/7.62mm

MX2EDGKM-7.5/7.62




MX2EDGK-7.5/7.62



Ordering information

订购方式/HOW TO ORDER

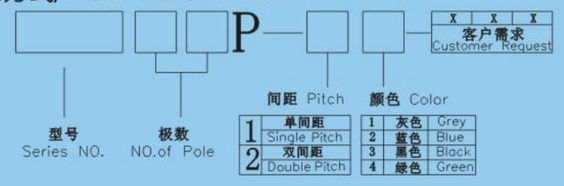


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	400V
Rated Current:	15A	20A
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	7.50mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

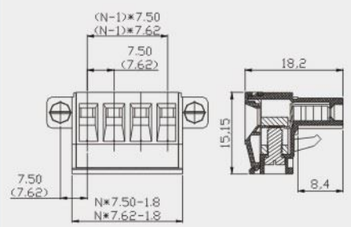



PLUGGABLE TERMINAL BLOCKS

Pitch: 7.50/7.62mm

MX2EDGKAM-7.50/7.62




MX2EDGKA-7.50/7.62



Ordering information

订购方式/HOW TO ORDER

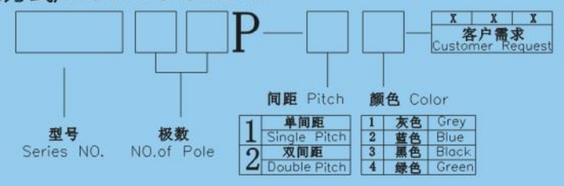


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	400V
Rated Current:	15A	20A
Wire range	24-12AWG/0. 2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	7.50mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

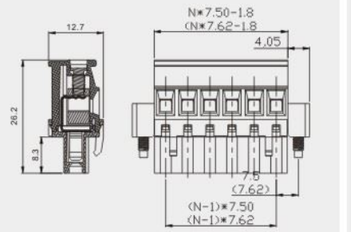



MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 7.5/7.62mm

MX2EDGKBM-7.50/7.62



MX2EDGKB-7.50/7.62



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	400V
Rated Current:	15A	20A
Wire range	24-12AWG/0.2-2.5mm2	
Withstanding voltage	AC4000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Phosphor bronze, Tin Plated	
Screw:	M3 steel, Ni Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	7.50mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PLUGGABLE TERMINAL BLOCKS

Pitch: 7.50/7.62mm

MX2EDGRCM-7.50/7.62




MX2EDGRC-7.50/7.62



Ordering information

订购方式/HOW TO ORDER

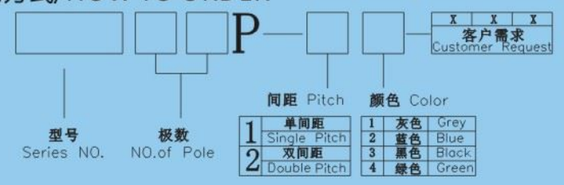


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	7.5mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PLUGGABLE TERMINAL BLOCKS

Pitch: 7.5/7.62mm

MX2EDGVCM-7.5/7.62




MX2EDGVC-7.5/7.62



Ordering information

订购方式/HOW TO ORDER

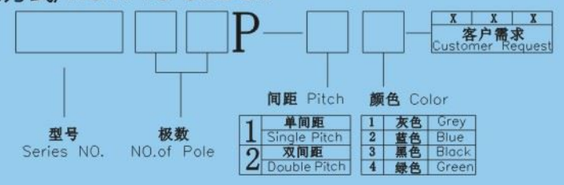


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	7.5mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)


N=No.of contacts





Pitch: 7.50/7.62mm

MX2EDGR-7.5/7.62




MX2EDGV-7.5/7.62



Ordering information

订购方式/HOW TO ORDER

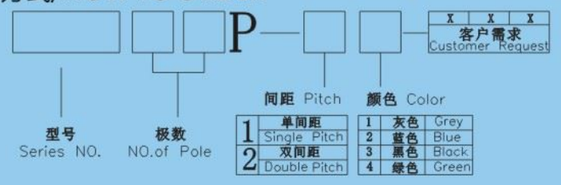


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding voltage	AC4000V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:		
Size		
Pitch:	7.5mm(.197″)7.62mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.00mm

MX301V-5.00




MX301R-5.00



Ordering information

订购方式/HOW TO ORDER

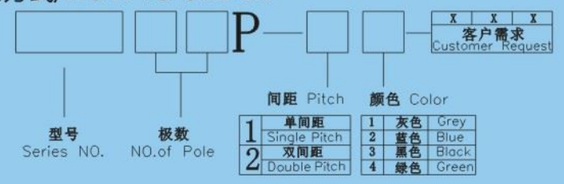


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	17A
Wire range	22-14AWG/0. 2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.00mm(. 25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)


N=No.of contacts





Pitch: 5.00mm

MX300V-5.00




MX300R-5.00



Ordering information

订购方式/HOW TO ORDER

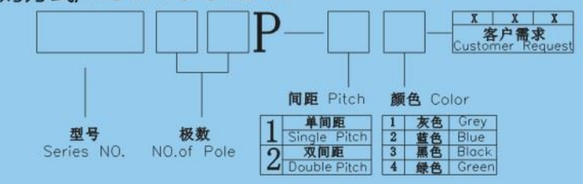


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	17A
Wire range	22-14AWG/0. 2-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(. 25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 7.50mm

MX300V-7.5




MX305V-7.5



Ordering information

订购方式/HOW TO ORDER

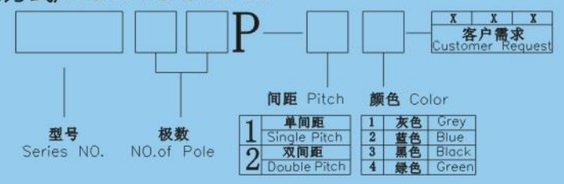


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	17A
Wire range	22-14AWG/0.2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	7.50mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.00mm

MX305V-5.0




MX306V-5.0



Ordering information

订购方式/HOW TO ORDER

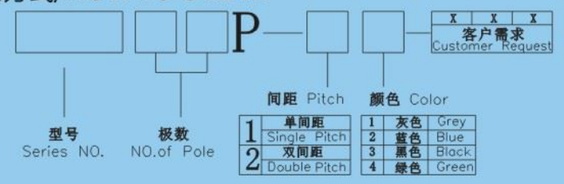


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	17A
Wire range	22-14AWG/0.5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PCB SCREW TERMINAL BLOCKS


Pitch: 7.50mm

MX360-7.5



Ordering information

订购方式/HOW TO ORDER

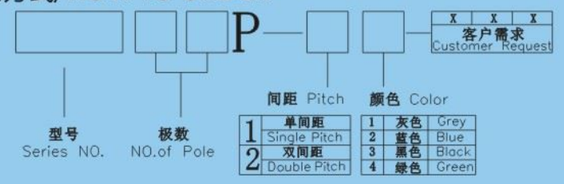


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	15A	24A
Wire range	22-14AWG/0.2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.00mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

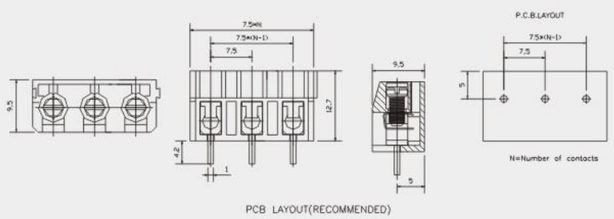

Pitch: 5.00mm

MX331-5.0




MX332K-5.0



Ordering information

订购方式/HOW TO ORDER

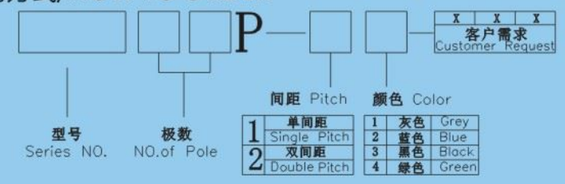


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A	15A
Wire range	28-14AWG/0.2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	5-6mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

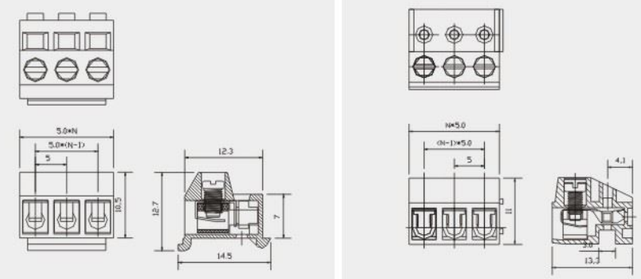


Pitch: 5.00mm

MX332J-5.0



Ordering information

订购方式/HOW TO ORDER

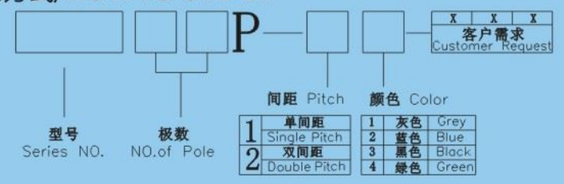


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A	15A
Wire range		
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PBT, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:		
Clamp:		
Size		
Pitch:	5.00mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



Pitch: 3.50mm

MX350V-3.5




MX350R-3.5



Ordering information

订购方式/HOW TO ORDER

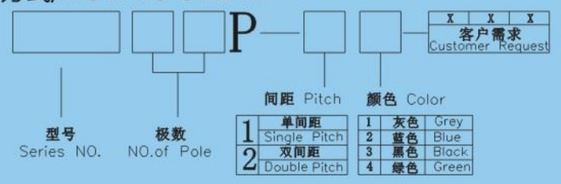


SPECIFICATION


Certification	cULus	VDE
Standard	cULus	IEC
Rated Voltage:	300V	250V
Rated Current:	7A	10A
Wire range	24-18AWG/0.2-1.0mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	5-6mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.0 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 3.96mm

MX396V-3.96




MX396R-3.96



Ordering information

订购方式/HOW TO ORDER

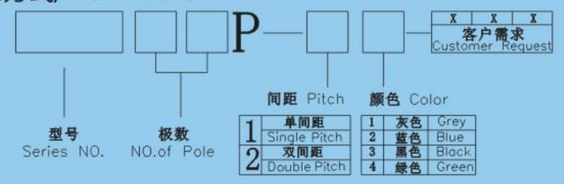


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	7A	10A
Wire range	24-18AWG/0.2-1.0mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	5-6mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.0 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.00mm

MX302V-5.0




MX302R-5.0



Ordering information

订购方式/HOW TO ORDER

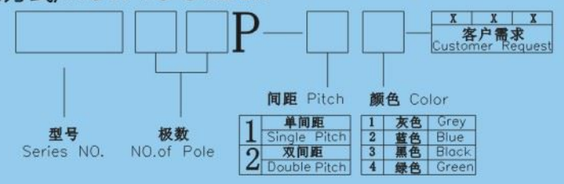


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	16A	25A
Wire range	22-14AWG/0.2-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS


Pitch: 5.00mm

MX125V-5.0



Ordering information

订购方式/HOW TO ORDER

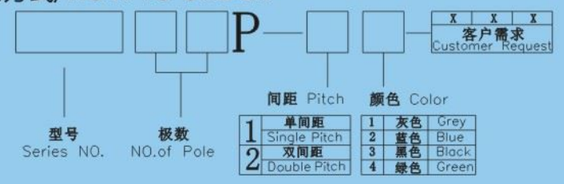


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 15A	
Wire range	22-16AWG/0.5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.0 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

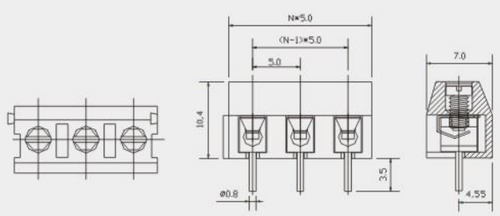

PCB SCREW TERMINAL BLOCKS

Pitch: 5.00mm

MX126V-5.0




MX126R-5.0



Ordering information

订购方式/HOW TO ORDER

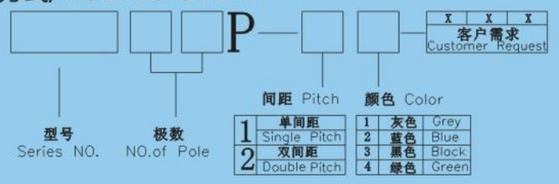


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 18A	
Wire range	20-14AWG/0.5-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.0mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS


Pitch: 5.00mm

MX166-5.0



Ordering information

订购方式/HOW TO ORDER

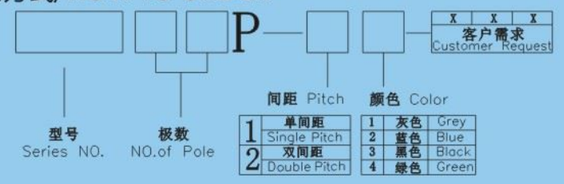


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 15A	
Wire range	22-14AWG/0. 5-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.00mm(. 138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

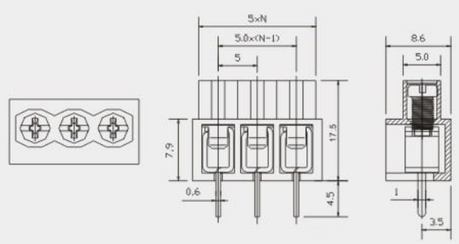

Pitch: 5.00mm

MX167V-5.0




MX167R-5.0



Ordering information

订购方式/HOW TO ORDER

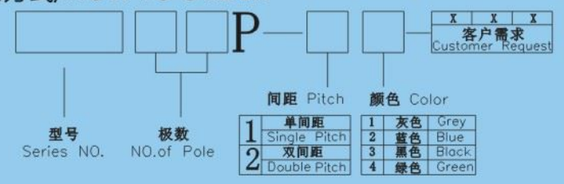


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 22A	
Wire range	22-12AWG/0. 5-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.00mm(. 138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





*Additional premating are available upon request, please consult factory.

PCB SCREW TERMINAL BLOCKS

MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 5.00mm

MX168-5.0




MX169-5.0



Ordering information

订购方式/HOW TO ORDER

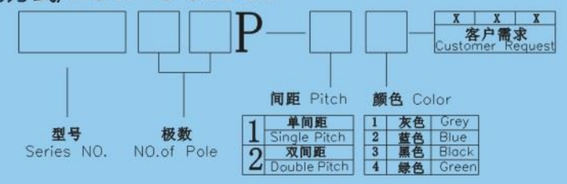


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 22A	
Wire range	22-12AWG/0. 5-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Stainless Steel	
Size		
Pitch:	5.00mm(. 25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






Pitch: 3.5/3.81mm

MX124-3.5/3.81



Ordering information

订购方式/HOW TO ORDER

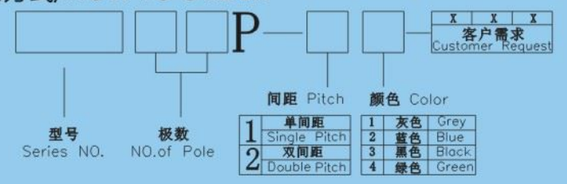


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	150V 300V	130V
Rated Current:	10A 10A	
Wire range	26-16AWG/0. 14-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.0 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(. 138″)3. 81(. 150″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS


Pitch: 5.00mm

MX330-5.0



Ordering information

订购方式/HOW TO ORDER

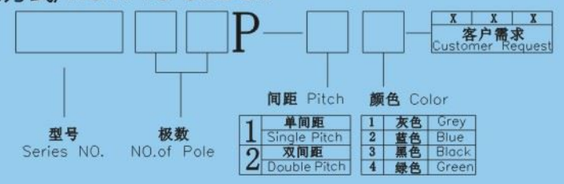


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	16A	17A
Wire range	22-14AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	4.5-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.00mm(. 138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

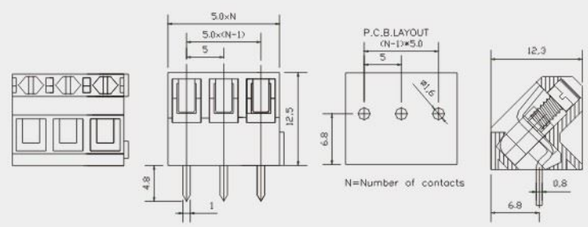

Pitch: 5.0/5.08mm

MX103-5.0/5.08




MX128S-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

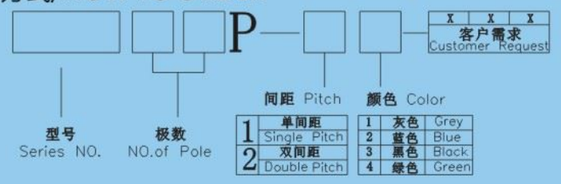


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	26-14AWG/0. 14-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(. 197″) 5.08(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)


N=No.of contacts



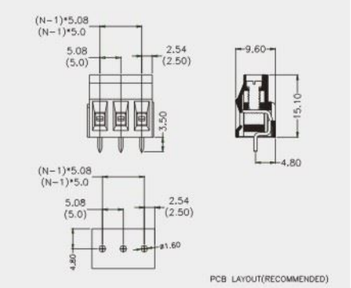


Pitch:
3.5mm
3.81mm
3.96mm

MX102-3.5/3.81/3.96



Ordering information

订购方式/HOW TO ORDER

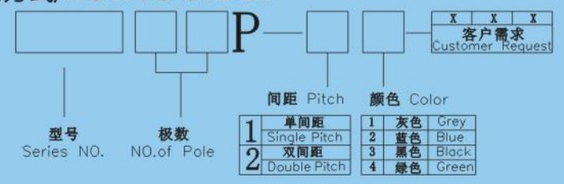


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 15A	
Wire range	24-16AWG/0. 5-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.2Nm(1.7Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	3.5mm(. 138″)	
Poles available:	2P-24P	

Dimensions


(Dimensions in mm)

N=No.of contacts

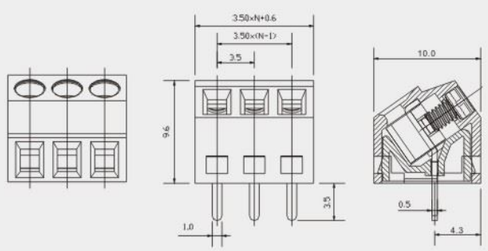


Pitch:
5.00mm

MX104-5.0



Ordering information

订购方式/HOW TO ORDER

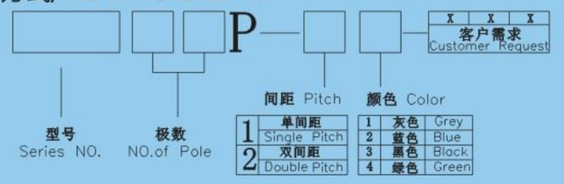


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 15A	
Wire range	24-14AWG/0. 5-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(. 197″)5.08(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)


N=No.of contacts

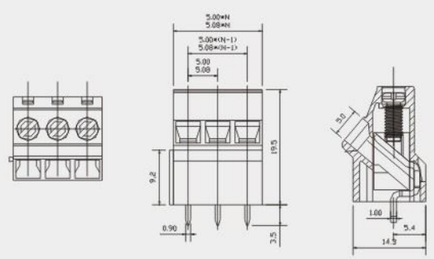

MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS


Pitch: 2.54mm

MX308-2.54



Ordering information

订购方式/HOW TO ORDER

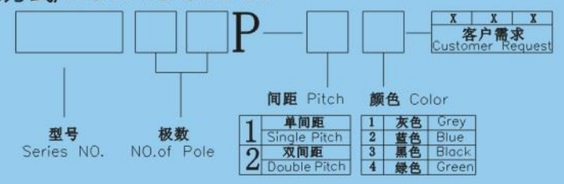


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	150V	130V
Rated Current:	6A	8A
Wire range	26-18AWG/0. 5-1.0mm2	
Withstanding voltage	AC1500V/1Min	
Mechanical		
Torque:	0.1Nm(0.89Lb-In.)	
Strip length:	3-5mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M1.6 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	2.54mm(. 138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

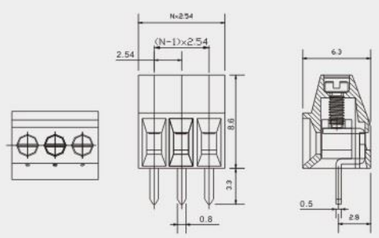

Pitch: 5.0/5.08mm

MX127-5.0/5.08




MX127A-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

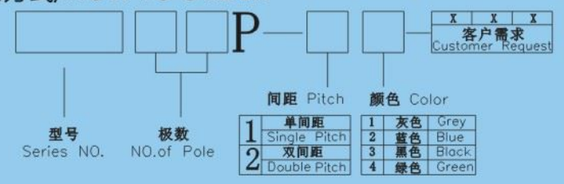


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	12A	15A
Wire range	26-16AWG/0. 14-1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.00mm(. 197″) 5.08mm(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

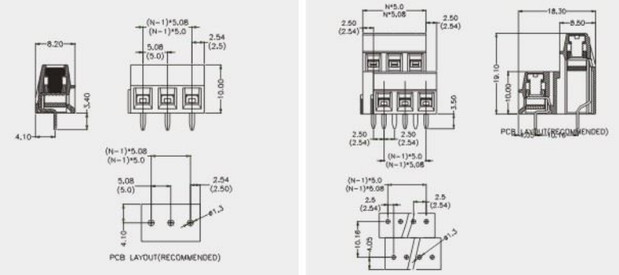

MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX128V-5.0/5.08




MX128H-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

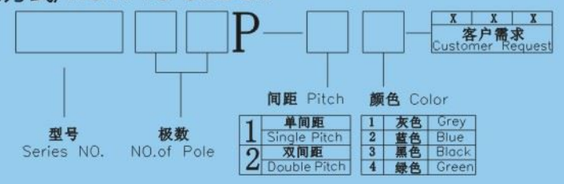


SPECIFICATION


Certification	cULus	VDE
Electrical Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 18A	
Wire range	26-14AWG/0. 14-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.00mm(.197″) 5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





PCB SCREW TERMINAL BLOCKS

Pitch: 5.0/5.08mm

MX500A-5.0/5.08




MX500B-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

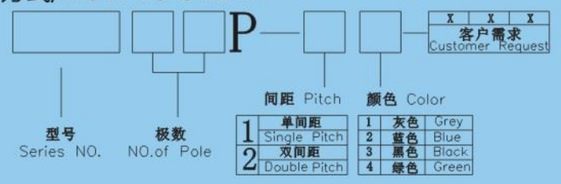


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A 15A	
Wire range	24-14AWG/0. 5-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	6-7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.00mm(.25″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



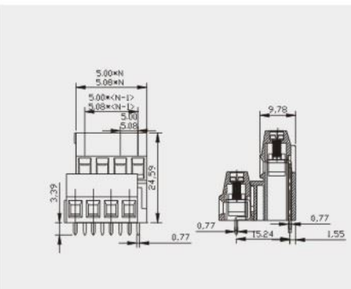

Pitch: 7.50/7.62mm

MX128R-7.5/7.62




MX128V-7.5/7.62



Ordering information

订购方式/HOW TO ORDER

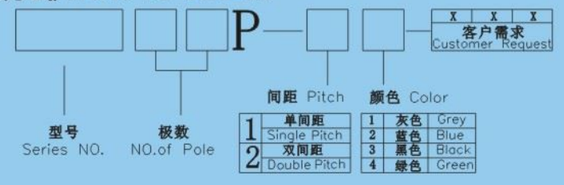


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	15A 18A	
Wire range	26-14AWG/0. 14-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	7.5mm(.295″)7.62mm(.30″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

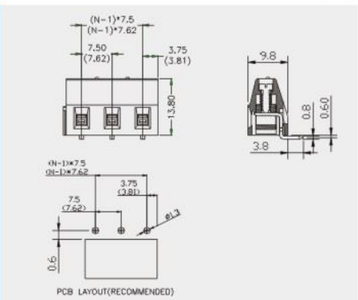

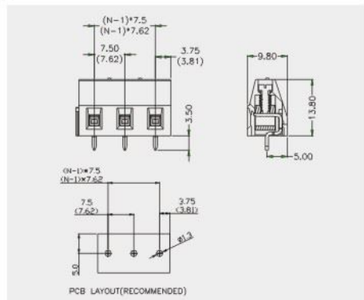


Pitch: 5.0/5.08mm

MX128R-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

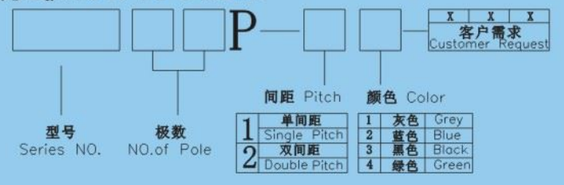


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 18A	
Wire range	26-14AWG/0. 14-2.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.4Nm(3.5Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.00mm(.197″)5.08mm(.200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)


N=No.of contacts



MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 5.00/5.08mm

MX129V-5.0/5.08




MX129R-5.0/5.08



Ordering information

订购方式/HOW TO ORDER

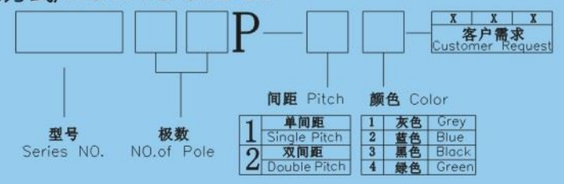


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	20A
Wire range	24-12AWG/0. 2-4mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	5.0mm(. 197″) 5.08mm(. 200″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.5/7.62mm

MX129V-7.5/7.62




MX129R-7.5/7.62



Ordering information

订购方式/HOW TO ORDER

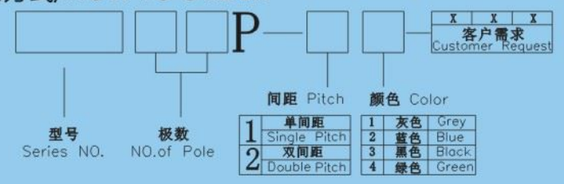


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	20A
Wire range	24-12AWG/0. 2-4mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	7mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	7.5mm(. 295″) 7.62mm(. 30″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 6.35/7.62mm

MX635-6.35




MX635-7.62



Ordering information

订购方式/HOW TO ORDER

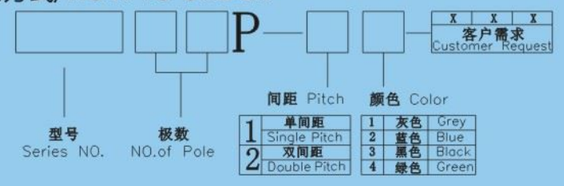


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	30A 24A	
Wire range	24-10AWG/0. 2-6.0mm2	
	24-10AWG/0. 2-4.0mm2	
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	6.35mm(.25″)7.62mm(.30″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62/9.50mm

MX950-7.62




MX950-9.50



Ordering information

订购方式/HOW TO ORDER

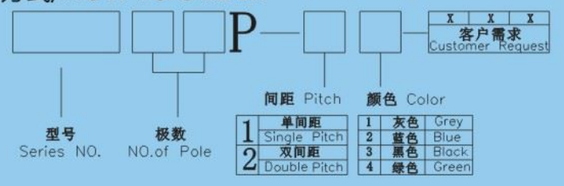


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	30A 32A	
Wire range	24-10AWG/0. 2-6.0mm2	
Withstanding voltage	AC3000V/1Min	
Mechanical		
Torque:	0.5Nm(4.4Lb-In.)	
Strip length:	8mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M3 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	9.5mm(.374″)9.52mm(.375″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






Pitch: 10.16mm

MX136-10.16



Ordering information

订购方式/HOW TO ORDER

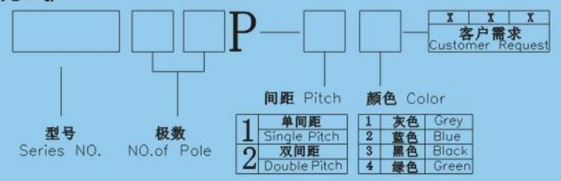


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	600V	750V
Rated Current:	50A	57A
Wire range	22-6AWG/1.0-16.0mm2	
	22-6AWG/1.0-16.0mm2	
Withstanding voltage	AC3000V/1Min	
Mechanical		
Torque:	1.2Nm(10.5Lb-In.)	
Strip length:	10mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	10.16mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)



N=No.of contacts


Pitch: 15.00mm

MX137-15. 0



Ordering information

订购方式/HOW TO ORDER

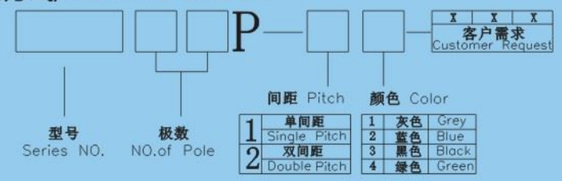


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	600V	1000V
Rated Current:	90A	125A
Wire range	20-2AWG/1.0-25.0mm2	
Withstanding voltage	AC3500V/1Min	
Mechanical		
Torque:	2.0Nm(17.5Lb-In.)	
Strip length:	15mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:	M5.0 steel, Zinc Plated	
Clamp:	Brass, Nickel Plated	
Size		
Pitch:	15.00mm(.138″)	
Poles available:	2P-24P	

Dimensions

(Dimensions in mm)

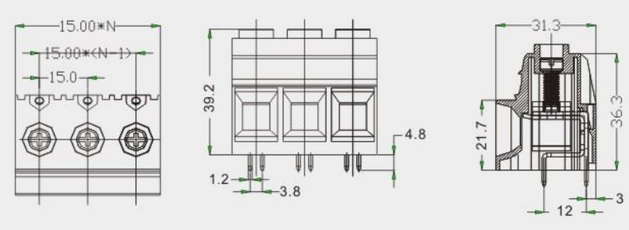

N=No.of contacts

MKX TERMINAL BLOCK
PCB SCREW TERMINAL BLOCKS

Pitch: 5.00mm

MX12V-M




MX12V-F



Ordering information

订购方式/HOW TO ORDER

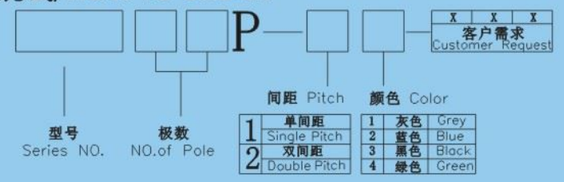


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	12V	12V
Rated Current:	15A	15A
Withstanding voltage	AC1500V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Size		
Pitch:	5.0mm(. 138″)	
Poles available:		

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 5.00mm

MX13V-M




MX13V-F



Ordering information

订购方式/HOW TO ORDER

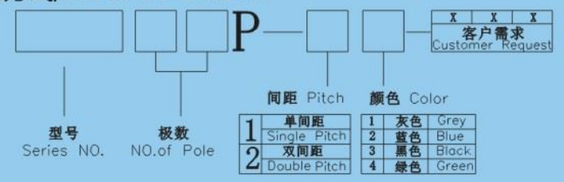


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	12V	12V
Rated Current:	15A	15A
Withstanding voltage	AC1500V/1Min	
Mechanical		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Pin header:	Brass, Tin Plated	
Screw:	M2.5 steel, Zinc Plated	
Size		
Pitch:	5.0mm(. 138″)	
Poles available:		

Dimensions

(Dimensions in mm)


N=No.of contacts






Pitch:
2.54mm

MX141V-2.54




MX141R-2.54



Ordering information

订购方式/HOW TO ORDER

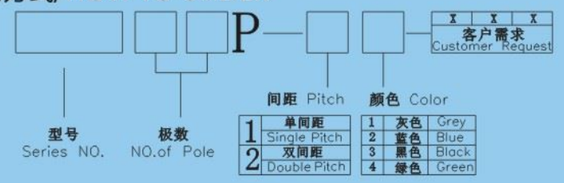


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	150V	130V
Rated Current:	2A	6A
Wire range	24-20AWG/1.0mm2	
Withstanding voltage	AC1250V/1Min	
Mechanical		
Torque:		
Strip length:	11mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:	Stainless steel	
Clamp:		
Size		
Pitch:	2.54mm(.200″)	
Poles available:	1P-XXP	

Dimensions


(Dimensions in mm)

N=No.of contacts

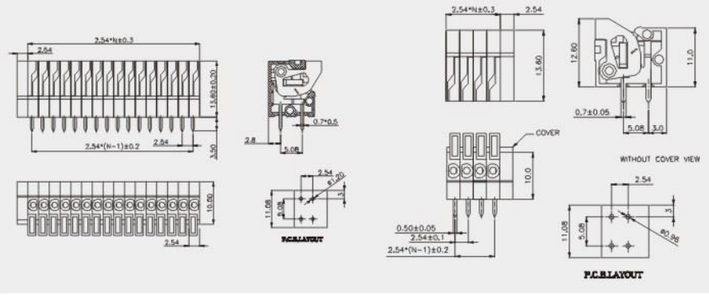


Pitch:
5.08mm
7.50mm
7.62mm

MX142V-5.08/7.5/7.62




MX142R-5.08/7.5/7.62



Ordering information

订购方式/HOW TO ORDER

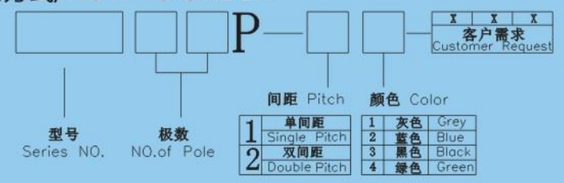


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	10A	15A
Wire range	22-16AWG/1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	11mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:	Stainless steel	
Clamp:		
Size		
Pitch:	5.08/7.5/7.62mm(.200″)	
Poles available:	1P-XXP	

Dimensions

(Dimensions in mm)

N=No.of contacts

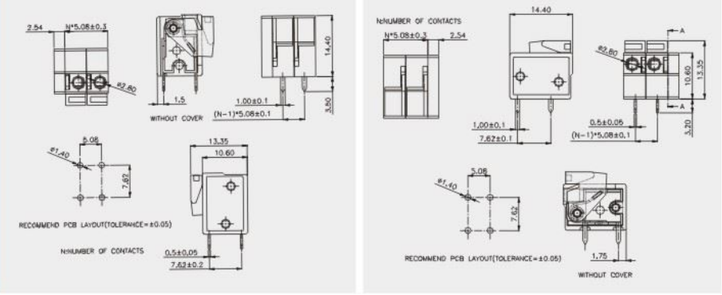

Pitch: 5.00mm

MX211V-5.00




MX211R-5.00



Ordering information

订购方式/HOW TO ORDER

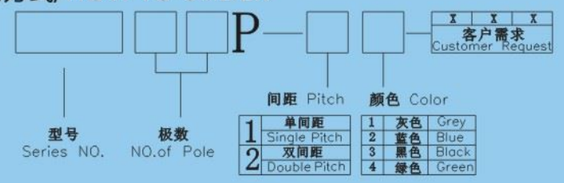



SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	10A
Wire range	26-16AWG/1.5mm2	
	26-16AWG/1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	8-9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:	Stainless steel	
Clamp:		
Size		
Pitch:	5.00mm(.200″)	
Poles available:	1P-XXP	

Dimensions

(Dimensions in mm)



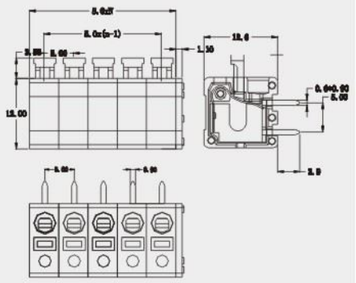


N=No.of contacts

Pitch: 2.50/3.50mm

MX250-2.5




MX250-3.5



Ordering information

订购方式/HOW TO ORDER

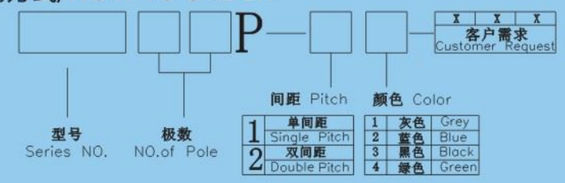



SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	5A	8A
Wire range	24-20AWG/0.5mm2	
	24-20AWG/0.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	8-9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:		
Clamp:		
Size		
Pitch:	2.50/3.50mm(.200″)	
Poles available:	2P-XXP	

Dimensions

(Dimensions in mm)

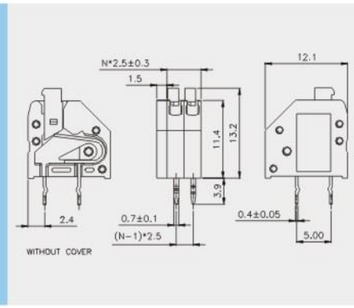


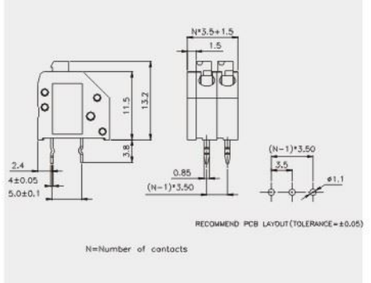

N=No.of contacts


Pitch: 5.00mm

MX235-5.0



Ordering information

订购方式/HOW TO ORDER

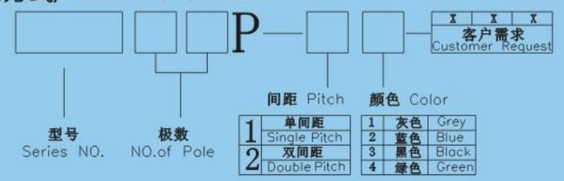


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	5A	10A
Wire range	20-18AWG/1.5mm2	
	20-18AWG/1.5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	8-9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:	Stainless steel	
Clamp:		
Size		
Pitch:	5.00mm(.200″)	
Poles available:	1P-XXP	

Dimensions

(Dimensions in mm)

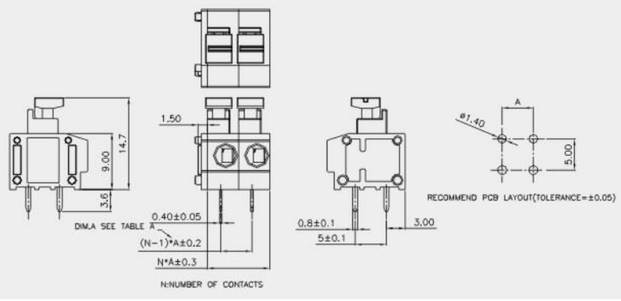

N=No.of contacts


Pitch: 4.00mm

MX158- 4.0



Ordering information

订购方式/HOW TO ORDER

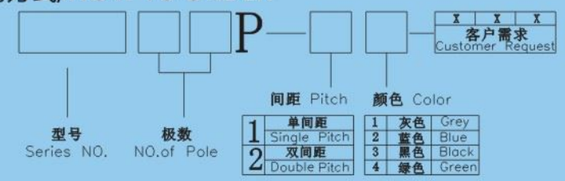


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	7A	9A
Wire range	24-18AWG/0.75mm2	
	24-18AWG/0.75mm2	
Withstanding voltage	AC1500V/1Min	
Mechanical		
Torque:		
Strip length:	8-9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Wire guard:		
Clamp:		
Size		
Pitch:	4.00mm(.200″)	
Poles available:	1P,2P,3P	

Dimensions

(Dimensions in mm)

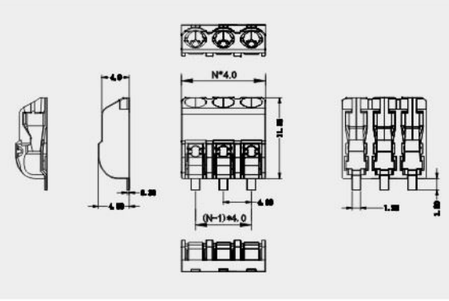

N=No.of contacts


ITEM NO.

MX3258



Ordering information

订购方式/HOW TO ORDER

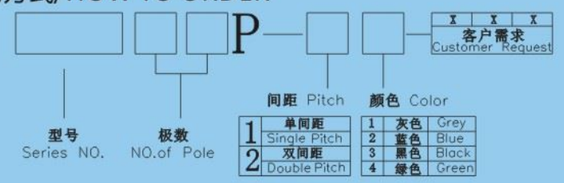


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	600V	450V
Rated Current:	20A	24A
Wire range	28-12AWG/2. 5mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:	8-9mm	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:		
Wire guard:	Stainless steel	
Clamp:		
Size		
Pitch:	4.60mm(. 200″)	
Poles available:	2P, 3P, 5P	

Dimensions

(Dimensions in mm)

N=No.of contacts

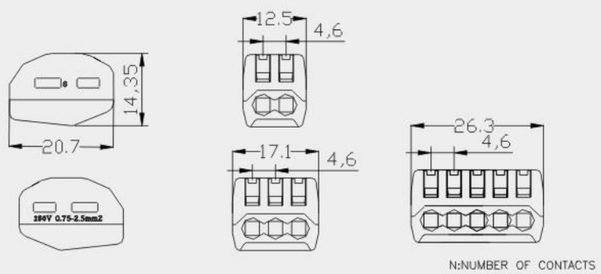

ITEM NO.

MX3358



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION

Certification:	cULus	VDE
Standard:	UL	IEC
Rated Voltage:	600V	400V
Rated Current:	20A	24A
Cross-section,solid(AMG/MM2):	16-12AWG/0.75-2.5mm2	
Withstanding voltage:	AC2500V/1Min	
Mechanical:		
Strip length:	12-13mm	
Material:		
Housing:	PA66,UL94V-0	
Terminal:	Copper,Tin Plated	
Wire guard:		
Size:		
Pitch:		
Poles available:	2P, 3P,4P, 5P	

Dimensions

(Dimensions in mm)

N=No.of contacts

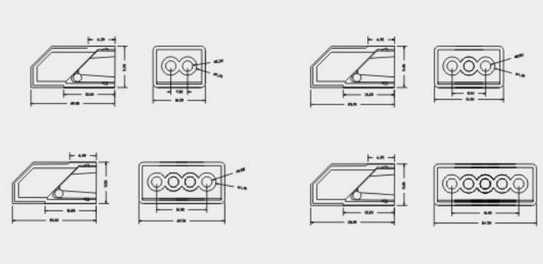


ITEM NO.

MX3458



Ordering information

订购方式/HOW TO ORDER

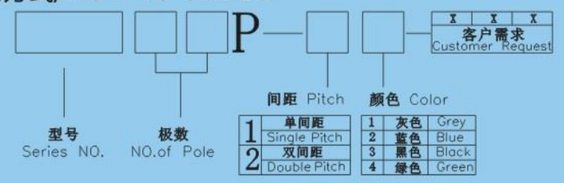


SPECIFICATION

Certification:	cULus	VDE
Standard:	UL	IEC
Rated Voltage:	600V	400V
Rated Current:	20A	24A
Installation side:		
Cross-section,solid:	17-14AWG/1.0-2.5mm2	
Lighting side:		
Cross-section,solid:	20-16AWG/0.5-2.5mm2	
Mechanical:		
Strip length:	9-11mm	
Material:		
Housing:	PA66,UL94V-0	
Terminal:	Copper,Tin Plated	
Size:	8.5*20.5*15.5/8.5*42.0*15.5	
Poles available:		

Dimensions

(Dimensions in mm)

N=No.of contacts

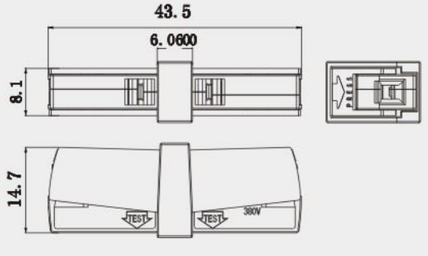


ITEM NO.

MX3558



Ordering information

订购方式/HOW TO ORDER

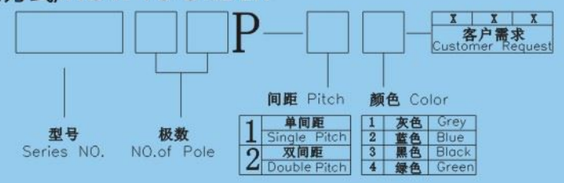


SPECIFICATION

Certification:	cULus	VDE
Standard:	UL	IEC
Rated Voltage:	600V	400V
Rated Current:	20A	24A
Cross-section,solid(AMG/MM2):	16-12AWG/0.75-2.5mm2	
Withstanding voltage:	AC2500V/1Min	
Mechanical:		
Strip length:	12-13mm	
Material:		
Housing:	PA66,UL94V-0	
Terminal:	Copper,Tin Plated	
Size:		
Pitch:		
Poles available:	2P, 4P,6P, 8P	

Dimensions

(Dimensions in mm)

N=No.of contacts

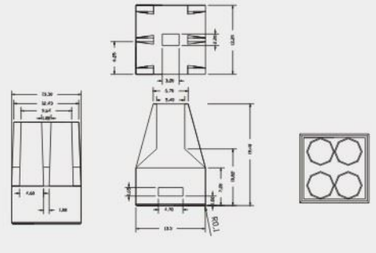

Pitch: 10.0mm

MX238-10.0



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	600V	450V
Rated Current:	20A	24A
Wire range	22-12AWG/0.75-2.5mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Tin Plated	
Screw:		
Clamp:		
Size		
Pitch:	10.00mm(.300″)	
Poles available:	2P-5P	

Dimensions

(Dimensions in mm)

N=No.of contacts

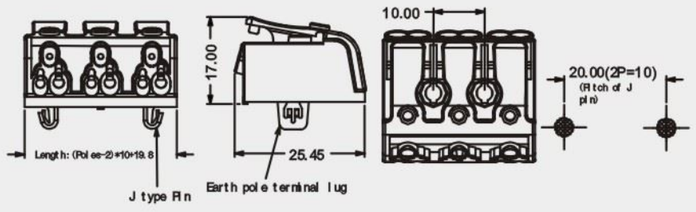

Pitch: 8.00mm

MX8H




MX8HWP



Ordering information

订购方式/HOW TO ORDER

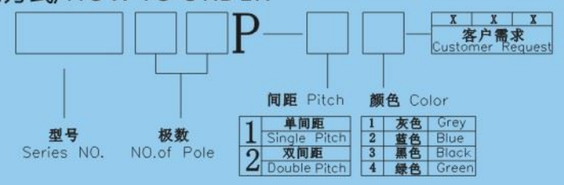


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	1.0-4.0mm2	
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M2.5 steel,Zinc Plated	
Clamp:		
Size		
Pitch:	8.00mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts

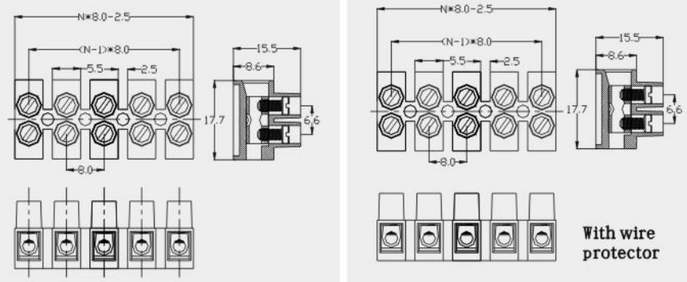

Pitch: 10.00mm

MX10H




MX10HWP



Ordering information

订购方式/HOW TO ORDER

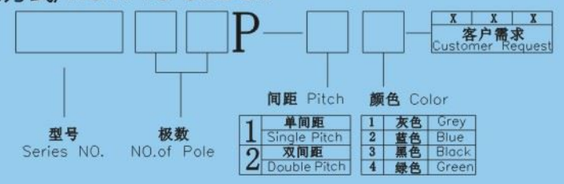


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	30A	41A
Wire range	1.5-6.0mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M3.0 steel,Zinc Plated	
Clamp:		
Size		
Pitch:	10.00mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





With wire protector

Pitch: 12.00mm

MX12H




MX12HWP



Ordering information

订购方式/HOW TO ORDER

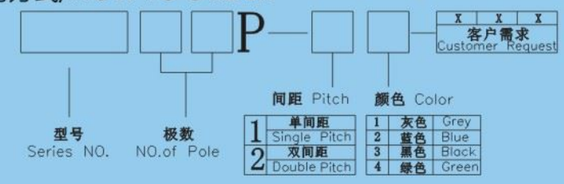


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	450V	750V
Rated Current:	30A	57A
Wire range	2.5-10.0mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M3.5 steel, Zinc Plated	
Clamp:		
Size		
Pitch:	12.00mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 13.5mm

MX14H



MX14HWP



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	450V	750V
Rated Current:	50A	76A
Wire range	2.5-16.0mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M4.0 steel,Zinc Plated	
Clamp:		
Size		
Pitch:	13.50mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





With wire protector

Pitch: 14.5mm

MX16H



MX16HWP



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	450V	750V
Rated Current:	57A	76A
Wire range	2.5-16.0mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M5.0 steel,Zinc Plated	
Clamp:		
Size		
Pitch:	14.50mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





With wire protector

Pitch: 16.5mm

MX18H




MX18HWP



Ordering information

订购方式/HOW TO ORDER

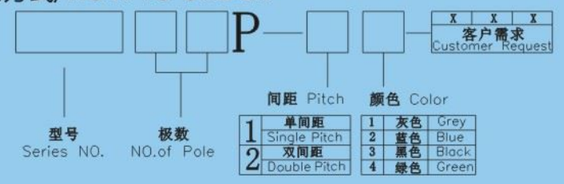


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	750V	1000V
Rated Current:	100A	85A
Wire range	2.5-25.0mm2	
Withstanding voltage		
Mechanical		
Torque:		
Strip length:		
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M5.0 steel,Zinc Plated	
Clamp:		
Size		
Pitch:	16.50mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





With wire protector

Pitch: 10.0mm




MX801



MX801-1

Ordering information

订购方式/HOW TO ORDER

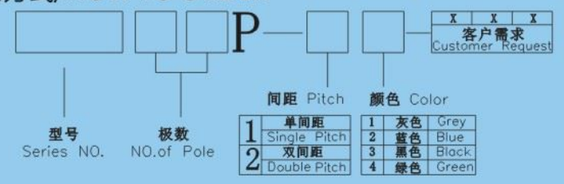


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	6A	7A
Wire range	22-14AWG/0.5-2.5mm2	
Withstanding voltage	AC2500V/1Min	
Insulation resistance	500M/DC1000V	
Mechanical		
Torque:	0.5Nm(4.4Lb-In)	
Operating temperature:	-40° C ~ +105° C	
Material		
Housing:	PA66, UL94V-0	
Terminal:	Brass, Nickel Plated	
Screw:	M3.0 steel, Zinc Plated	
Size		
Pitch:	10.0mm(.300″)	
Poles available:	2P-12P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62mm

MX25C




MX25S



Ordering information

订购方式/HOW TO ORDER

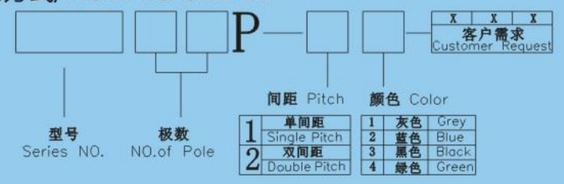


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 24A	
Wire range	26–14AWG/0.5–2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62mm

MX25R




MX25H



Ordering information

订购方式/HOW TO ORDER

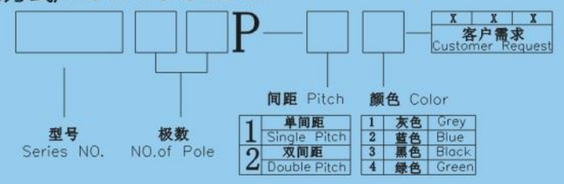


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A 24A	
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62mm

MX25CG



MX25SG



Ordering information

订购方式/HOW TO ORDER

□ □ □P— □ □ — XXX 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62mm

MX25RG



MX25HG



Ordering information

订购方式/HOW TO ORDER

□ □ □P— □ □ — XXX 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
8.25mm

MX30C




MX30S



Ordering information

订购方式/HOW TO ORDER

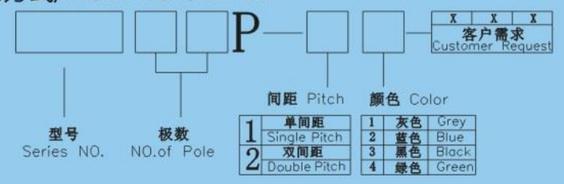


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.25mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
8.25mm

MX30R




MX30H



Ordering information

订购方式/HOW TO ORDER

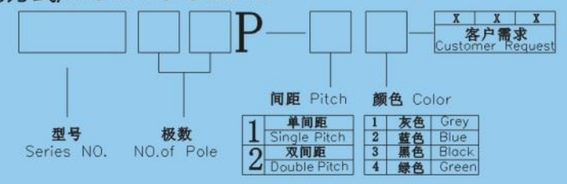


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.25mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



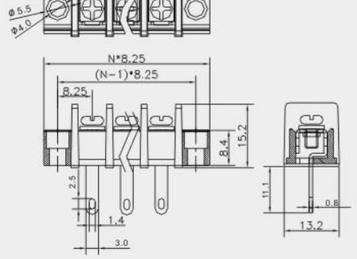

MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch: 8.25mm

MX30CG




MX30SG



Ordering information

订购方式/HOW TO ORDER

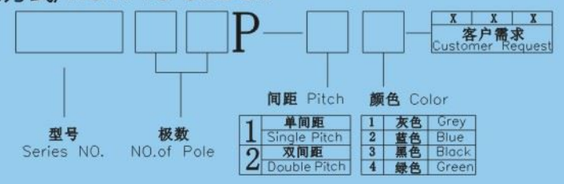


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.25mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 8.25mm

MX30RG




MX30HG



Ordering information

订购方式/HOW TO ORDER

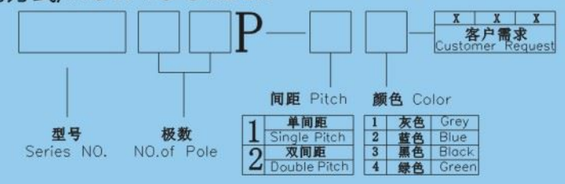


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.25mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
8.50mm

MX35C




MX35S



Ordering information

订购方式/HOW TO ORDER

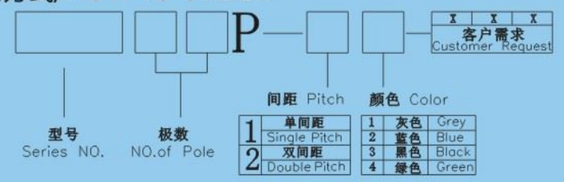


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
8.50mm

MX35R




MX35H



Ordering information

订购方式/HOW TO ORDER

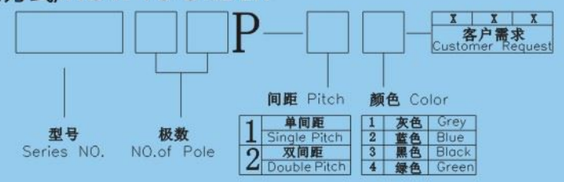


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch:
8.50mm

MX35CG




MX35SG



Ordering information

订购方式/HOW TO ORDER

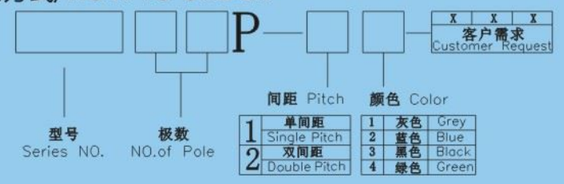


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)


N=No.of contacts





Pitch:
8.50mm

MX35RG




MX35HG



Ordering information

订购方式/HOW TO ORDER

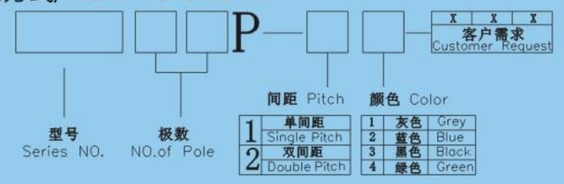


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch: 9.50mm

MX45C



MX45S



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	25A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts



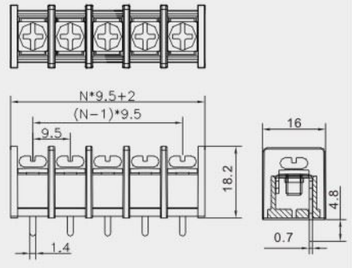

Pitch: 9.50mm

MX45R



MX45H



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	25A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

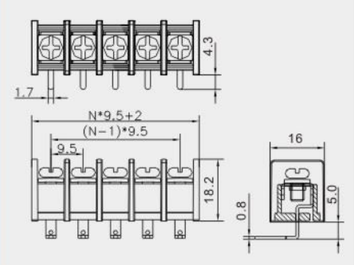



BARRIER TERMINAL BLOCKS

MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch: 9.50mm

MX45CG



MX45SG



Ordering information

订购方式/HOW TO ORDER

□□□P—□□—XXX 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	25A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 9.50mm

MX45RG



MX45HG



Ordering information

订购方式/HOW TO ORDER

□□□P—□□—XXX 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch: 1 单间距 Single Pitch; 2 双间距 Double Pitch | 颜色 Color: 1 灰色 Grey; 2 蓝色 Blue; 3 黑色 Black; 4 绿色 Green


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	25A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch:
10.00mm

MX55C



MX55S



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cUus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	10.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
10.00mm

MX55R



MX55H



Ordering information

订购方式/HOW TO ORDER




SPECIFICATION


Certification	cUus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	10.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





BARRIER TERMINAL BLOCKS

MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch:
10.00mm

MX55CG




MX55SG



Ordering information

订购方式/HOW TO ORDER

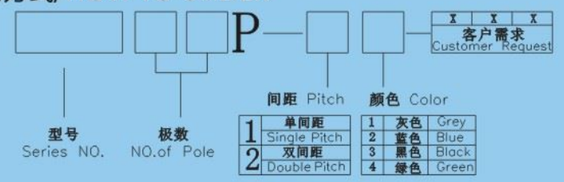


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	10.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch:
10.00mm

MX55RG




MX55HG



Ordering information

订购方式/HOW TO ORDER

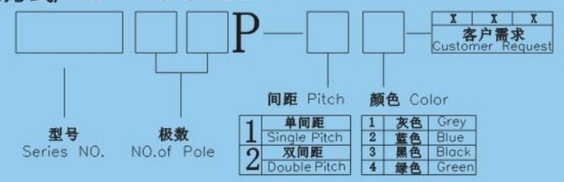


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	10.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts






BARRIER TERMINAL BLOCKS

MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch: 11.00mm

MX65C




MX65S



Ordering information

订购方式/HOW TO ORDER

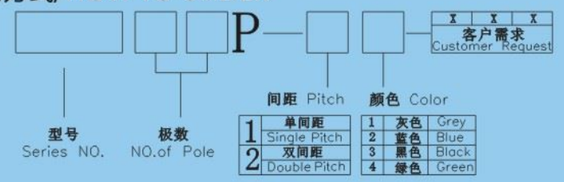


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	11.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 11.00mm

MX65R




MX65H



Ordering information

订购方式/HOW TO ORDER

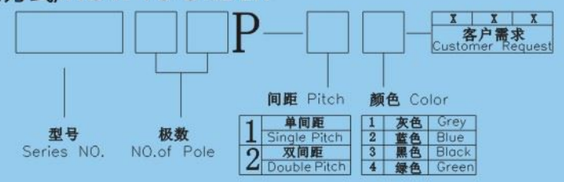


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	11.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





BARRIER TERMINAL BLOCKS

Pitch: 11.00mm

MX65CG




MX65SG



Ordering information

订购方式/HOW TO ORDER

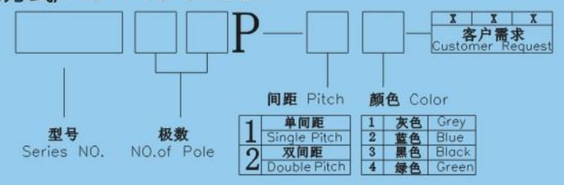


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	11.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 11.00mm

MX65RG




MX65HG



Ordering information

订购方式/HOW TO ORDER

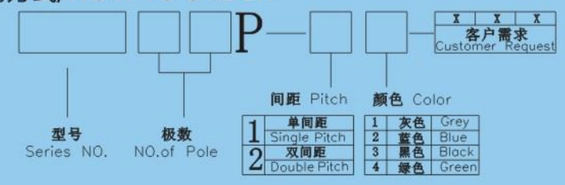


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	750V
Rated Current:	30A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	11.00mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 6.35mm

MX635




MX635G



Ordering information

订购方式/HOW TO ORDER

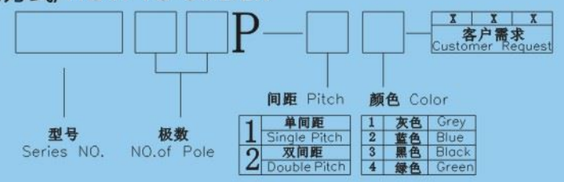


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	16A	20A
Wire range	22–16AWG/1.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.4Nm(3.54Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M2.5 steel, Ni Plated	
Clamp:		
Size		
Pitch:	6.35mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 7.62mm

MX762




MX762G



Ordering information

订购方式/HOW TO ORDER

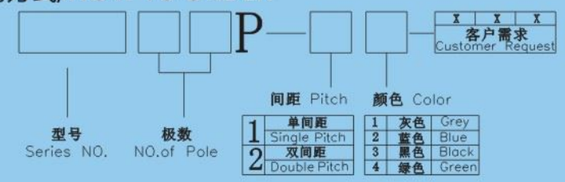


SPECIFICATION


Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.8Nm(7.02Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.5 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts





Pitch: 8.50mm

MX850




MX850G



Ordering information

订购方式/HOW TO ORDER

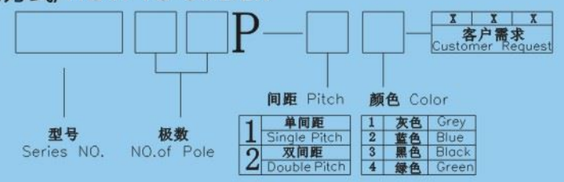


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.8Nm(7.02Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.5 steel, Ni Plated	
Clamp:		
Size		
Pitch:	8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

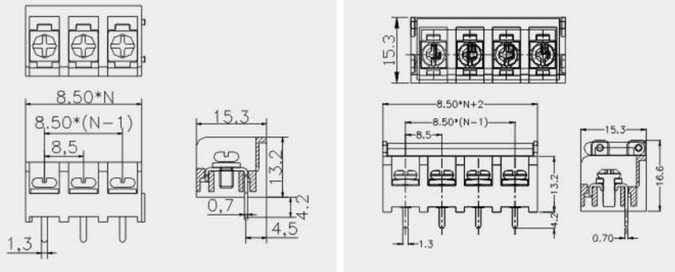

Pitch: 9.50mm

MX950




MX950G



Ordering information

订购方式/HOW TO ORDER

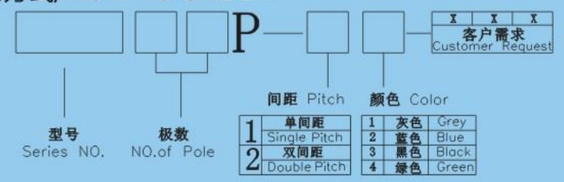


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	25A	32A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	1.2Nm(10.53Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M4.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

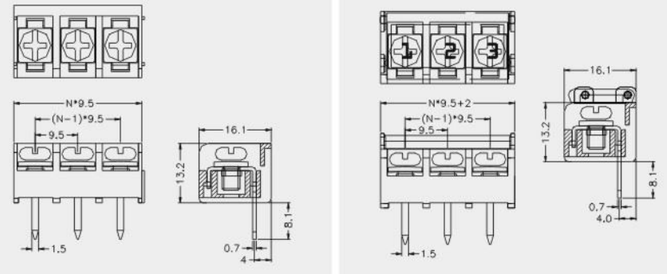

*Additional premating are available upon request, please consult factory.

MKX TERMINAL BLOCK
BARRIER TERMINAL BLOCKS

Pitch:
8.25mm

MX825




MX825G



Ordering information

订购方式/HOW TO ORDER

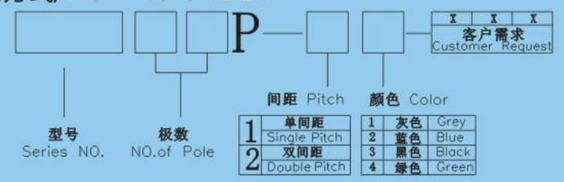


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.8Nm(7.02Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3·5 steel, Nickel Plated	
Clamp:		
Size		
Pitch:	8.25mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

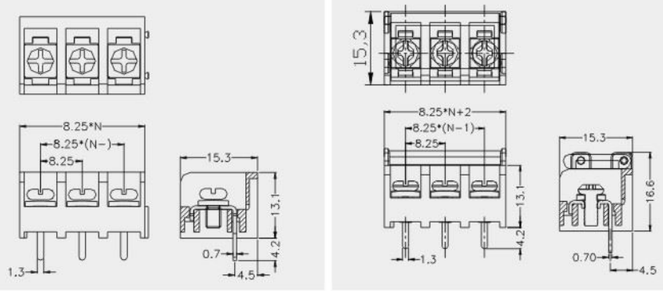

Pitch:
7.62/8.50mm

MX7620




MX8500



Ordering information

订购方式/HOW TO ORDER

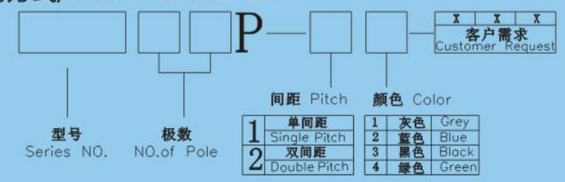


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	22–14AWG/2.5mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	7.62/8.50mm(.300")	
Poles available:	2P–24P	

Dimensions

(Dimensions in mm)

N=No.of contacts

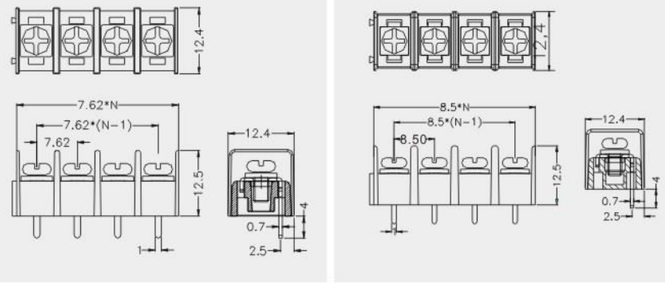

BARRIER TERMINAL BLOCKS


Pitch: 9.50mm

MX9500



Ordering information

订购方式/HOW TO ORDER

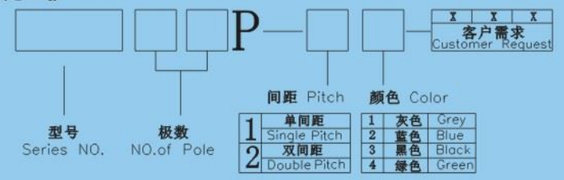


SPECIFICATION

Certification	cULus	VDE
Standard	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	20A	24A
Wire range	22–12AWG/4.0mm2	
Withstanding voltage	AC2000V/1Min	
Insulation resistance	500MΩ/DC500V	
Mechanical		
Torque:	0.5Nm(4.4Lb–In.)	
Operating temperature:	–40℃ ~ +105℃	
Material		
Housing:	PA66,UL94V–0	
Terminal:	Brass, Tin Plated	
Screw:	M3.0 steel, Ni Plated	
Clamp:		
Size		
Pitch:	9.50mm(.300")	
Poles available:	2P–24P	

Dimensions


(Dimensions in mm)

N=No.of contacts

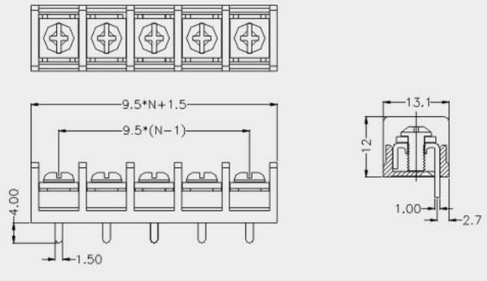

Pitch: 2.54mm

DS



FEATURES and APPLICATION

FEATURES
1.Tactile response is performed directly by larger contact pressure to ensure very stable contact.
2.All plastics are UL 94V–0 grade fire retardant.
3.Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering.
4.Contact wiping on make and break. Gold, Silver, or Tin plated contacts to ensure low contact resistance and long mechanical life.
5.Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required.
6.RoHs compliant.

APPLICATIONS
1.Numerical setting for computer terminal equipment
2.Price setting for vending machines
3.Programming for game machines
4.Programming for industrial equipment and measuring instruments


SPECIFICATION

1、ELECTRICAL		
switching:	25mA	24VDC
non-switching:	100mA	
Contact resistance:		
initial	50MΩ Max	
after life test	100MΩ Max	
Insulation resistance	100MΩ Min. at 100VDC	
Dielectric strength	500VDC Min. for 60 seconds	
Capacitance between adiacent switches		
5pF MAX		
2、Mechanical and ENVIRONMENTAL		
Temperature rating		
Operating	–25℃ to +70℃	
Storage	–40℃ to +85℃	
Operation force	800g Max	
Mechanical life	2000 operations	
Humidity	95%RH, 40℃ for 95 Hrs	
Vibration	Per MIL–STD–202F, method 204D	
Solderability	After flux 230 ± 5℃ for 5 ± 0.5 seconds,95% coverage	
Resistance to soldering heat	260 ± 5℃ for 5 ± 1 seconds	

Dimensions


(Dimensions in mm)

N=No.of contacts

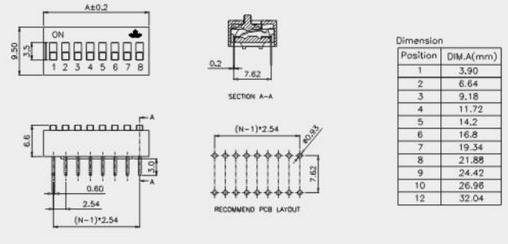

Pitch: 2.54mm

DP



FEATURES and APPLICATION

FEATURES
1.Tactile response is performed directly by larger contact pressure to ensure very stable contact.
2.All plastics are UL 94V–0 grade fire retardant.
3.Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering.
4.Contact wiping on make and break. Gold, Silver, or Tin plated contacts to ensure low contact resistance and long mechanical life.
5.Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required.
6.RoHs compliant.
APPLICATIONS
1.Numerical setting for computer terminal equipment
2.Price setting for vending machines
3.Programming for game machines
4.Programming for industrial equipment and measuring instruments


SPECIFICATION

1、ELECTRICAL		
switching:	25mA	24VDC
non-switching:	100mA	
Contact resistance:		
initial	50MΩ Max	
after life test	100MΩ Max	
Insulation resistance	100MΩ Min. at 100VDC	
Dielectric strength	500VDC Min. for 60 seconds	
Capacitance between adiacent switches		
5pF MAX		
2、Mechanical and ENVIRONMENTAL		
Temperature rating		
Operating	–25℃ to +70℃	
Storage	–40℃ to +85℃	
Operation force	800g Max	
Mechanical life	2000 operations	
Humidity	95%RH, 40℃ for 95 Hrs	
Vibration	Per MIL–STD–202F, method 204D	
Solderability	After flux 230 ± 5℃ for 5 ± 0.5 seconds,95% coverage	
Resistance to soldering heat	260 ± 5℃ for 5 ± 1 seconds	

Dimensions

(Dimensions in mm)

N=No.of contacts




Dimension

Position	DIM.A(mm)
1	3.90
2	6.64
3	9.18
4	11.72
5	14.2
6	16.8
7	19.34
8	21.88
9	24.42
10	26.96
12	32.04

Pitch: 2.54mm

DA



FEATURES and APPLICATION

FEATURES
1.Tactile response is performed directly by larger contact pressure to ensure very stable contact.
2.All plastics are UL 94V–0 grade fire retardant.
3.Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering.
4.Contact wiping on make and break. Gold, Silver, or Tin plated contacts to ensure low contact resistance and long mechanical life.
5.Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required.
6.RoHs compliant.
APPLICATIONS
1.Numerical setting for computer terminal equipment
2.Price setting for vending machines
3.Programming for game machines
4.Programming for industrial equipment and measuring instruments


SPECIFICATION

1、ELECTRICAL		
switching:	25mA	24VDC
non-switching:	100mA	
Contact resistance:		
initial	50MΩ Max	
after life test	100MΩ Max	
Insulation resistance	100MΩ Min. at 100VDC	
Dielectric strength	500VDC Min. for 60 seconds	
Capacitance between adiacent switches		
5pF MAX		
2、Mechanical and ENVIRONMENTAL		
Temperature rating		
Operating	–25℃ to +70℃	
Storage	–40℃ to +85℃	
Operation force	800g Max	
Mechanical life	2000 operations	
Humidity	95%RH, 40℃ for 95 Hrs	
Vibration	Per MIL–STD–202F, method 204D	
Solderability	After flux 230 ± 5℃ for 5 ± 0.5 seconds,95% coverage	
Resistance to soldering heat	260 ± 5℃ for 5 ± 1 seconds	

Dimensions

(Dimensions in mm)

N=No.of contacts




Dimension

Position	DIM.A(mm)
1	3.90
2	6.64
3	9.18
4	11.72
5	14.2
6	16.8
7	19.34
8	21.88
9	24.42
10	26.96
12	32.04

Pitch: 2.54mm

DI



FEATURES and APPLICATION

FEATURES
1.Tactile response is performed directly by larger contact pressure to ensure very stable contact.
2.All plastics are UL 94V–0 grade fire retardant.
3.Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering.
4.Contact wiping on make and break. Gold, Silver, or Tin plated contacts to ensure low contact resistance and long mechanical life.
5.Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required.
6.RoHs compliant.
APPLICATIONS
1.Numerical setting for computer terminal equipment
2.Price setting for vending machines
3.Programming for game machines
4.Programming for industrial equipment and measuring instruments


SPECIFICATION

1、ELECTRICAL		
switching:	25mA	24VDC
non-switching:	100mA	
Contact resistance:		
initial	50MΩ Max	
after life test	100MΩ Max	
Insulation resistance	100MΩ Min. at 100VDC	
Dielectric strength	500VDC Min. for 60 seconds	
Capacitance between adiacent switches		
5pF MAX		
2、Mechanical and ENVIRONMENTAL		
Temperature rating		
Operating	–25℃ to +70℃	
Storage	–40℃ to +85℃	
Operation force	800g Max	
Mechanical life	2000 operations	
Humidity	95%RH, 40℃ for 95 Hrs	
Vibration	Per MIL–STD–202F, method 204D	
Solderability	After flux 230 ± 5℃ for 5 ± 0.5 seconds,95% coverage	
Resistance to soldering heat	260 ± 5℃ for 5 ± 1 seconds	

Dimensions

(Dimensions in mm)


N=No.of contacts



Dimension		
Poles	A(mm)	B(mm)
2P	6.08	2.54
3P	8.62	5.08
4P	11.16	7.62
5P	13.70	10.16
6P	16.24	12.70
7P	18.78	15.24
8P	21.32	17.78
9P	23.86	20.32
10P	26.40	22.86
11P	28.94	25.40
12P	31.48	27.94

Pitch: 2.54mm

DM



FEATURES and APPLICATION

FEATURES
1.Tactile response is performed directly by larger contact pressure to ensure very stable contact.
2.All plastics are UL 94V–0 grade fire retardant.
3.Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering.
4.Contact wiping on make and break. Gold, Silver, or Tin plated contacts to ensure low contact resistance and long mechanical life.
5.Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required.
6.RoHs compliant.
APPLICATIONS
1.Numerical setting for computer terminal equipment
2.Price setting for vending machines
3.Programming for game machines
4.Programming for industrial equipment and measuring instruments


SPECIFICATION

1、ELECTRICAL		
switching:	25mA	24VDC
non-switching:	100mA	
Contact resistance:		
initial	50MΩ Max	
after life test	100MΩ Max	
Insulation resistance	100MΩ Min. at 100VDC	
Dielectric strength	500VDC Min. for 60 seconds	
Capacitance between adiacent switches		
5pF MAX		
2、Mechanical and ENVIRONMENTAL		
Temperature rating		
Operating	–25℃ to +70℃	
Storage	–40℃ to +85℃	
Operation force	800g Max	
Mechanical life	2000 operations	
Humidity	95%RH, 40℃ for 95 Hrs	
Vibration	Per MIL–STD–202F, method 204D	
Solderability	After flux 230 ± 5℃ for 5 ± 0.5 seconds,95% coverage	
Resistance to soldering heat	260 ± 5℃ for 5 ± 1 seconds	

Dimensions

(Dimensions in mm)

N=No.of contacts

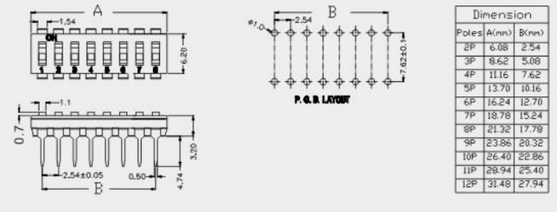

Dimension		
Poles	A(mm)	B(mm)
2P	6.08	2.54
3P	8.62	5.08
4P	11.16	7.62
5P	13.70	10.16
6P	16.24	12.70
7P	18.78	15.24
8P	21.32	17.78
9P	23.86	20.32
10P	26.40	22.86
11P	28.94	25.40
12P	31.48	27.94

SLIDE TYPE SWITCH