




RoHS Compliant Customer Drawing


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



- 材质及电镀 (Material)
 焊针 (Pin header): 黄铜, 镀锡 (Brass, Tin plated)
 零件 (Housing): PA66, UL94V-0
- 电气性能 (Electrical)
 额定电压 (Rated Voltage): 300V
 额定电流 (Rated Current): 16A
 接触电阻 (Contact Resistance): 20mΩ
 绝缘电阻 (Insulation Resistance): 5000MΩ/1000V
 耐电压 (Withstanding Voltage): AC1500V/1min
- 机械性能 (Mechanical)
 温度范围 (Temperature Range): -40℃~ +105℃
 瞬时温度 (MAX Soldering): +250℃, 5秒 (5 Seconds)



订购方式/HOW TO ORDER

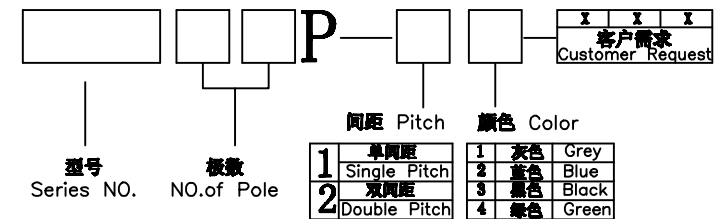

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No. of contacts

公差一览表				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE				单位	制图	陈冬梅	产品名称
X.	±0.25	X*	±5°	mm	角法	顾兴伟	MXHT396R-3.96
.X	±0.20	.X*	±2°	角法	设计		图号
.XX	±0.15	.XX*	±1°	比例	审核		MXHT396R-3.96
.XXX	±0.02	.XXX*	±0.5°	版本	核准		图号
日期	2012.07.10	DATE	版本	A0	核准		图号
			UNIT	mm	DRAWING		PART NO.
			VIEW	1:1	DESIGN		DRAW NO.
			SCALE	A0	APPD		