
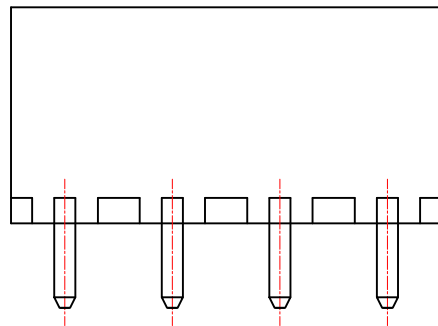
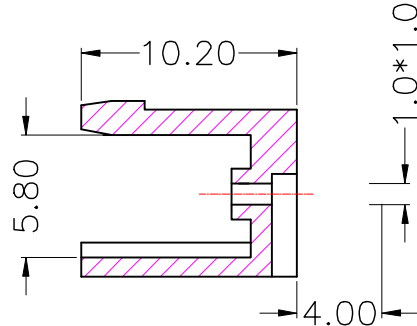


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

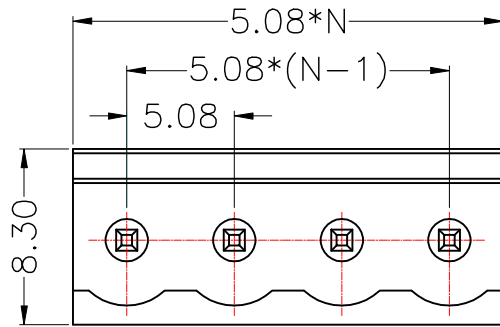

N=No.of contacts

·材质及电镀(Material)

·焊针(Pin header):黄铜,镀锡(Brass,Tin plated)
·塑件(Housing): PA66, UL94V-0


·电气性能(Electrical)

·额定电压(Rated Voltage): 300V
·额定电流(Rated Current): 10A
·接触电阻(Contact Resistance): 20mΩ
·绝缘电阻(Insulation Resistance): 5000MΩ/1000V
·耐电压(Withstanding Voltage): AC1500V/1Min

·机械性能(Mechanical)

·温度范围(Temperature Range): -40℃~ +105℃
·瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

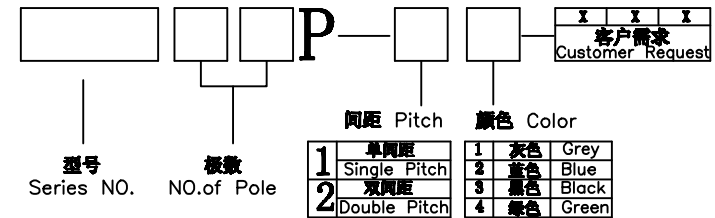

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MXHT508V-5.08
.X	±0.20	.X°	±2°	角法	∅	设计	顾兴伟	图号	
.XX	±0.15	.XX°	±1°	比例	1:1	审核		产品料号	MXHT508V-5.08
.XXX	±0.02	.XXX°	±0.5°	日期	2012.07.10	版本	A0	图号	MXHT508V-5.08-0A
				DATE		APPD		DRAW NO.	