

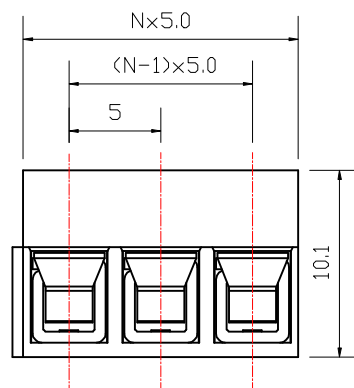


Customer Drawing

- 材質及電鍍(Material)
 - 線皮(Scow):M2.5, 鋼鍍鎳(steel, zinc Plated)
 - 夾片(Wire Protection): 磷青銅, 鍍鎳或不銹鋼(Phosphor bronze, Ni plated or stainless steel)
 - 焊針(Tin header): 黃銅, 鍍鎳(Bronze, Tin plated)
 - housing(Housing): PA66, UL94V-0
- 電氣性能(Electrical)
 - 額定電壓(Rated Voltage): 300V
 - 額定電流(Rated Current): 10A
 - 接觸電阻(Contact Resistance): 20mΩ
 - 絕緣電阻(Insulation Resistance): 500MΩ/1000V
 - 耐電壓(Withstanding Voltage): AC1500V/1Min
 - 使用線徑(Wire Range): 26-14AWG 2.5mm²
- 機械性能(Mechanical)
 - 溫度範圍(Temperature Range): -40℃~+165℃
 - 瞬時溫度(MAX Soldering): +250℃, 5秒(5 Seconds)
 - 扭矩(Torque): 0.3Nm(2.7lbf.in)
 - 插針長度(Strip Length): 6-7mm



客户需求
Customer Request

型号
Series NO.

极数
NO. of Pole

间距 Pitch

1	单间距
2	双间距

颜色 Color

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green
5	橙色	Orange
6	红色	Red
7	透明	Transparent
8	黄色	Yellow
9	白色	White

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表			 宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD						
TOLERANCE UNLESS OTHERWISE									
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 NAME	MX126R-5.0
.X	±0.20	.X°	±2°	画法 VIEW		设计 DESIGN	顾兴伟		
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		产品料号 PART NO.	MX126R-5.0
.XXX	±0.02	.XXX°	±0.5°	版本 VER	A0	核准 APPD		图号 DRAW NO.	MX126R-5.0-0A
日期 DATE		2012. 07. 10							