

REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE

NOTE 1:
UL标准 (UL Standard)

- 额定电压/额定电流: 300V/20A
Rated voltage/Rated current: 300V/20A
- 绝缘耐压: AC1600V/1h
Withstanding Voltage: AC1600V/1h
- 线径范围: 28~12AWG
Wire range: 28~12AWG

IEC标准 (IEC Standard)

- 额定电压与电流: 450V/20A
Rated voltage/Rated current: 450V/20A
- 线径范围: 2.5mm²
Wire range: 2.5mm²

NOTE 2:

- 间距 (Pitch): 7.50mm
- 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
- 引线长度: 6~7mm
Stripping length: 6~7mm
- 符合RoHS环保要求
RoHS Compliance
- 额定扭矩: 0.8N.m 4.49 [Lb. In]
(Rated torque): 0.8N.m 4.49 [Lb. In]
- 未标注公差按
Unlaminated tolerances






间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)	间距/线径 (mm)
≤6	6	10	≤30	30	60	100	≥	0.1/10
10	10	24	60	60	100	150	≥	1/10
±0.15	±0.20	±0.30	±0.20	±0.30	±0.30	±0.70	±1.00	±1"

订购方式 (HOW TO ORDER)
MX129V-7.50-□□□□□□□□□□

型号 间距 线径 客户型号
Series No. Pitch Poles Customer Request

- 单间距 Single Pitch
- 双间距 Double Pitch
- 颜色 (Color)
- 灰色 (Gray)
- 蓝色 (Blue)
- 黑色 (Black)
- 绿色 (Green)
- 黄色 (Orange)
- 红色 (Red)
- 黄色 (Yellow)
- 白色 (White)
- 透明 (Transparent)

PCB LAYOUT

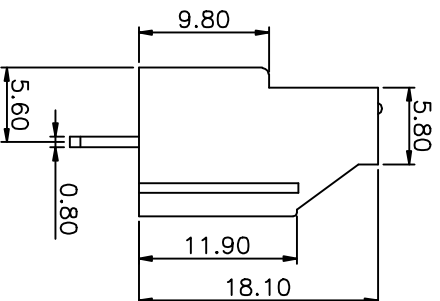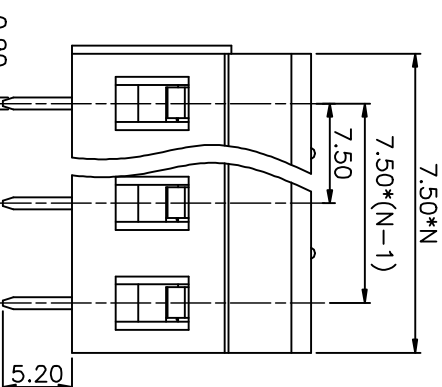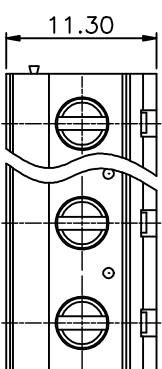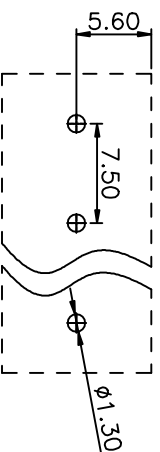

ITEM	NAME OF PART	MATERIAL	NOTES	THIRD ANGLE PROJECTION	图号	比例
4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍	PART NO.: /	型号	MX129V-7.50-XXP
3	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡	APPD: /	系列	MX129V-7.50
2	(Screw) 螺丝	(Steel) 钢	(Ni plated) 镀镍	CHKD: /	图号	MX129750001
1	(Housing) 罩件	PA66	UL94V-0	DRFT: /		页码 1/1
						比例 1:1

宁波迈科思电子科技有限公司
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD

A 8 7 6 5 4 3 2 1