

RoHS Compliant


Customer Drawing

REV. ECN NO.


DESCRIPTION

DATE DESIGN

- 材料及电镀 (Material)  
 镀层 (Source): Ni, 铜, 镍, 锡 (enamel, zinc plated)  
 触点 (Contacts): 黄铜, 镀锡 (Brass, Ni plated)  
 零件 (Pin header): 铜, 镀锡 (Brass, Tin plated)  
 零件 (Branding): PA66, UL94V-0
- 电气性能 (Electrical)  
 额定电压 (Rated Voltage): 600V  
 额定电流 (Rated Current): 50A  
 接触电阻 (Contact Resistance): 20mΩ  
 绝缘电阻 (Insulation Resistance): 5000MΩ/1000V  
 耐电压 (Withstanding Voltage): AC3000V/1Min  
 使用寿命 (Wire Range): 20-6 AWG 16mm²
- 机械性能 (Mechanical)  
 温度范围 (Temperature Range): -40℃~+105℃  
 耐焊温度 (MAX Soldering): +250℃, 5秒 (5 Seconds)  
 扭矩 (Torque): 1.2Nm (10.6lb.in)  
 剥线长度 (Strip length): 10mm

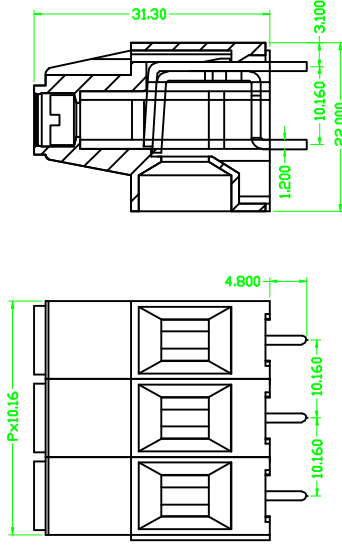

### 订购方式/HOW TO ORDER

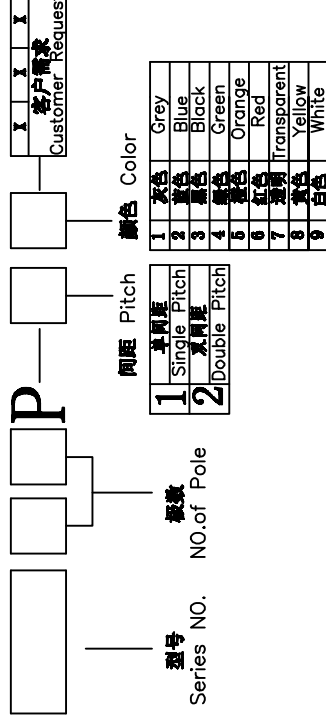

## 宁波迈思电子科技有限公司

### NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD

公差一览表 TOLERANCE UNLESS OTHERWISE	单位 UNITS	制图 DRAWING	产品名称 TITLE
X, ±0.25	X°, ±5°	陈冬梅	MX136HT-10.16
.X ±0.20	.X°, ±2°	设计 DESIGN	顾兴伟
.XX ±0.15	.XX°, ±1°	审核 CHECK	
.XXX ±0.02	.XXX°, ±0.5°	批准 APPRO	
日期 DATE	版本 VER		
2012.07.10	A0		

N=No. of contacts