RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

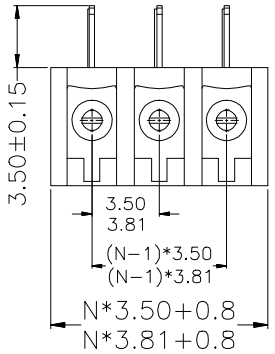







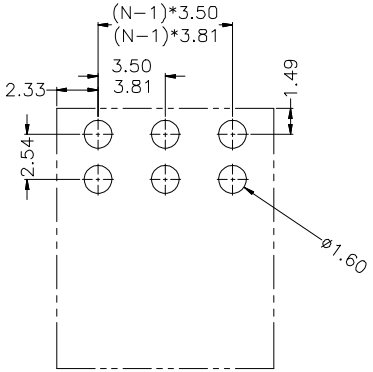

P.C.B.LAYUOT

·Material
①Housing: PA66, UL94V-0
②Pin header:Phosphor bronze,Tin piated

·Electrical
Rated Voltage: 300V
Rated Corrent: 8A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/1000V
Withstanding Voltage: AC1500V/1Min

·Mechanical
Temperature Range: -40℃～ +105℃
MAX Soldering: +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

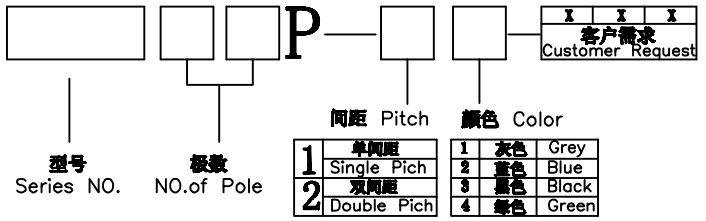

N=Number of Poles
Dim P=(N−1)x3.50
(N−1)x3.81
Dim L=Nx3.50+0.8
Nx3.81+0.8

Poles \ Dim	Dim P	Dim L
2−6P	±0.10	±0.15
7−12P	±0.20	±0.20
13−18P	±0.25	±0.30
19−24P	±0.30	±0.40

公差一览表 TOLERANCE UNLESS OTHERWISE								
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE: MX15EDGA-3.5/3.81
.X	±0.20	.X°	±2°	角法 VIEW		设计 DESIGN	顾兴伟	
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO. MX15EDGA-3.5/3.81
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD		图号 DRAW NO. MX15EDGA-3.5/3.81-0A

宁波迈科思电子科技有限公司
NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD