

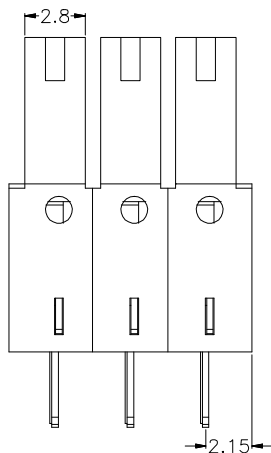
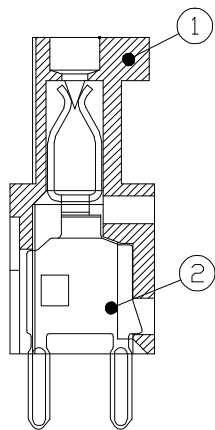


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



N=Number of Poles
 Dim P=(N-1)x3.50
 (N-1)x3.81
 Dim L=Nx3.50+0.8
 Nx3.81+0.8

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.15
7-12P		±0.20	±0.20
13-18P		±0.25	±0.30
19-24P		±0.30	±0.40

·Material

- ①Housing: PA66, UL94V-0
- ②Pin header: Phosphor bronze, Tin plated


·Electrical

- Rated Voltage: 300V
- Rated Current: 8A
- Contact Resistance: 20mΩ
- Insulation Resistance: 500MΩ/1000V
- Withstanding Voltage: AC1500V/1Min

·Mechanical

- Temperature Range: -40℃ ~ +105℃
- MAX Soldering: +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

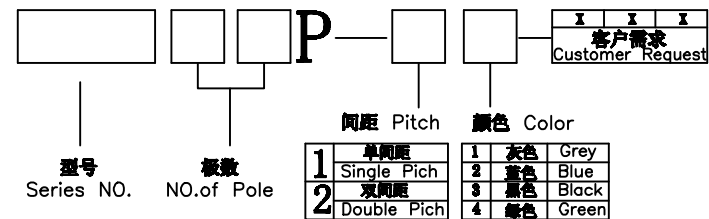

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X*	±5°	单位	mm	制图	陈冬梅	产品名称	MX15EDGB-3.5/3.81
.X	±0.20	.X*	±2°	角法		设计	顾兴伟	TM	
.XX	±0.15	.XX*	±1°	VIEW		审核		产品料号	MX15EDGB-3.5/3.81
.XXX	±0.02	.XXX*	±0.5°	比例	1:1	核准		PART NO.	
日期	2012.07.10			版本	A0	核准		图号	MX15EDGB-3.5-0A
DATE				VER		APPD		DRAW NO.	