


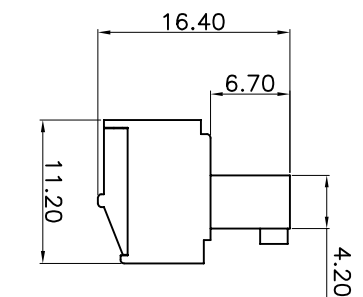



REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE



NOTE 1:
UL标准 (UL Standard)
1. 额定电压与电流: 300V/8A
Rated voltage/Rated current: 300V/8A
2. 功频耐压: AC1600V/Min
Wi withstanding Voltage :AC1600V/Min
3. 线径范围: 28~16AWG
Wire range: 28~16AWG
IEC标准 (IEC Standard)
1. 额定电压与电流: 250V/7A
Rated voltage/Rated current : 250V/7A
2. 线径范围: 0.5~1.5mm²
Wire range : 0.5~1.5mm²

NOTE 2:
1. 间距 (Pitch): 3.81mm
2. 使用温度范围: -40℃~+105℃
Operating temperature : -40℃~+105℃
3. 剥线长度: 6~7mm
Stripping length: 6~7mm
4. 符合RoHS环保要求
RoHS Compliance
5. 额定扭矩: 1.8 [lb. in]
(Rated torque): 1.8 [lb. in]
6. 未标公差表
Undimensioned tolerances

间距公差 (mm)	其他尺寸公差 (mm)					公差带
Pitch range in mm	Nominal dimension range in mm					±
≤6	6	10	≤30	30	60	0.1/10
10	10	24	60	100	150	<
±0.15	±0.20	±0.30	±0.50	±0.50	±0.70	±1.00

订购方式 (HOW TO ORDER)
MX15BDGK-3.81-□-□P-□-□-□-□-□-□-□

型号 间距 极数 颜色 (Color) 客户型号
Series NO. Pitch Poles Customer Request

1. 单间距 Single Pitch 1. 灰色 (Gray) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
2. 双间距 Double Pitch 5. 棕色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)

N = No. of contacts

ITEM	NAME OF PART	MATERIAL	NOTES	PART NO.:	系列	图号	页码
1	(Screw) 螺丝 M2.0	(Steel) 钢	(Zn plated) 镀锌	APPD: /	MX15EDGK-3.81	MX15EDGK381001	1/1
2	(Housing) 塑件	PA66	UL94V-0	CHKD: /	MX15EDGK-3.81-XXX		1/1
3	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡	DRFT: /			
4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍				

