



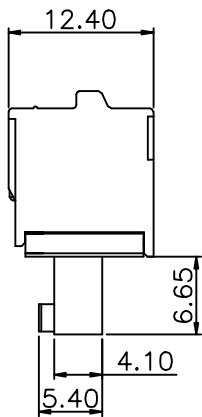


8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

REVISION RECORD				
REV	ECN.	DESCRIPTION	DRFT	DATE



**NOTE 1:**

**UL标准 (UL Standard)**

- 额定电压与电流: 300V/8A  
Rated voltage/Rated current: 300V/8A
- 功频耐压: AC1600V/Min  
Withstanding Voltage: AC1600V/Min
- 线径范围: 28~16AWG  
Wire range: 28~16AWG

**IEC标准 (IEC Standard)**

- 额定电压与电流: 250V/7A  
Rated voltage/Rated current: 250V/7A
- 线径范围: 0.5~1.5mm<sup>2</sup>  
Wire range: 0.5~1.5mm<sup>2</sup>

**NOTE 2:**

- 间距 (Pitch): 3.81mm
- 使用温度范围: -40℃~+105℃  
Operating temperature: -40℃~+105℃
- 剥线长度: 8mm  
Stripping length: 8mm
- 符合RoSE环保要求  
RoHS Compliance
- 未标注公差表  
Undimensioned tolerances

开槽方向公差 (mm)		其他尺寸公差 (mm)						
Pitch range in mm		Nominal dimension range in mm						
≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	0.1/10
±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1°

**订购方式 (HOW TO ORDER)**

MX15EDGKD-3.81-□□P-□ - □ - □□□□

型号 间距 极数 客户型号  
Series NO. Pitch Poles Customer Request

- 单间距  
Single Pitch
- 双间距  
Double Pitch

- 颜色 (Color)
- 灰色 (Gray)
  - 蓝色 (Blue)
  - 黑色 (Black)
  - 绿色 (Green)
  - 橙色 (Orange)
  - 红色 (Red)
  - 黄色 (Yellow)
  - 白色 (White)
  - 透明 (Transparent)

3	(Spring) 弹片	(Stainless steel) 不锈钢	
2	(Contact) 触点	(Copper alloy) 铜合金 (Ni plated) 镀镍	
1	(Housing) 壳体	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	

**宁波迈科思电子科技有限公司**  
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD

型号	MX15EDGKD-3.81-XXP	页码	1/1
系列	MX15EDGKD-3.81	比例	1:1
图号	MX15EDGKD381001		

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1