



RoHS Compliant

Customer Drawing


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

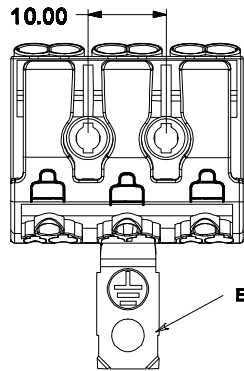


Earth pole terminal lug



J type Pin



Earth pole terminal lug



N=No.of contacts

·材质及电镀(Material)

触点(Contact):磷青铜, 镀锡 (Phosphor, 镀锡 (Steel, Tin plated)

弹片 (Wire Guard) : 不锈钢, 镀镍 (Steel, Ni Plated)

塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)

额定电压(Rated Voltage): 450V

额定电流 ( Rated Corrent): 16A

耐电压(Withstanding Voltage): AC2500V/1Min

使用线径 ( Wire Range) (AWG/MM<sup>2</sup>):22-12AWG/0.75-2.5MM<sup>2</sup>

·机械性能(Mechanical)

温度范围(Temperature Range): -40℃~ +105℃

剥线长度(Strip length): 6-7mm

订购方式/HOW TO ORDER

P

型号 Series NO.      极数 NO.of Pole      间距 Pitch      颜色 Color

1	单间距	1	灰色	Grey
2	双间距	2	蓝色	Blue
3		3	黑色	Black
4		4	绿色	Green
5		5	橙色	Orange
6		6	红色	Red
7		7	透明	Transparent
8		8	黄色	Yellow
9		9	白色	White

客户需求 Customer Request

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表								<b>宁波迈科思电子科技有限公司</b> NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE											
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX238		
.X	±0.20	.X°	±2°	角法 VIEW	设计 DESIGN	顾兴伟					
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	MX238		
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD	图号 DRAW NO.	MX238-A0	