
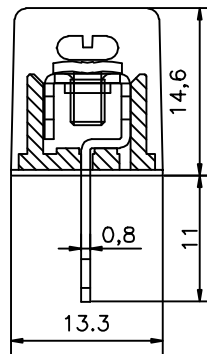
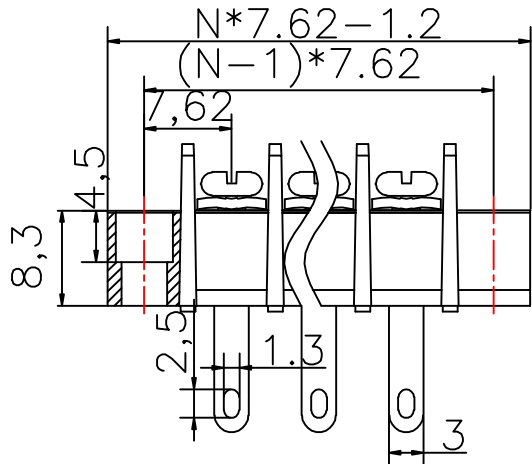



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

- 材质及电镀(Material)
 壳体(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.7μ 镀锡(Brass, Tin Plated)
 螺丝(Screw): M3, 铜, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 20A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~+105℃
 适用线径(Wire Range): 22-14AWG
 最大扭矩值(Max. Torque Value): 0.5N.m 4.4Lb.in

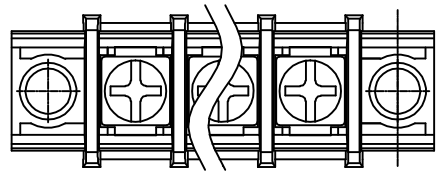

订购方式/HOW TO ORDER

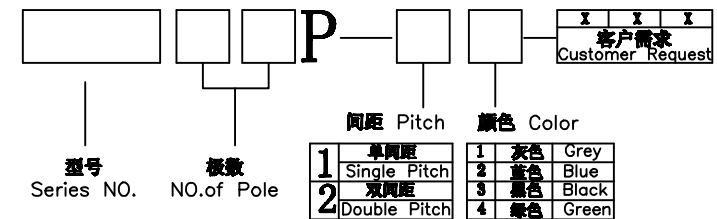

CONTACT WITH US:
 TEL: +86-574-63505128 FAX: +86-574-63532183
 E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MX25H-7.62
.X	±0.20	.X°	±2°	UNITS		DRAWING		TMK	
.XX	±0.15	.XX°	±1°	角法	⊕ ⊖	设计	顾兴伟		
.XXX	±0.02	.XXX°	±0.5°	VIEW		DESIGN		产品料号	MX25H-7.62
日期	2012.07.10			SCALE	1:1	审核		PART NO.	MX25H-7.62
DATE				版本	A0	核准		图号	MX25H-7.62-0A
				VER		APPD		DRAW NO.	