

2 REVISION RECORD 1

REV	ECN.	DESCRIPTION	DRFT	DATE

NOTE 1:
UL标准 (UL Standard)

- 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A
- 过载额定值: AC1600V/1h
Withstanding Voltage: AC1600V/1h
- 线径范围: 28~12AWG
Wire range: 28~12AWG

IEC标准 (IEC Standard)

- 额定电压与电流: 400V/20A
Rated voltage/Rated current: 400V/20A
- 线径范围: 2.5mm²
Wire range: 2.5mm²

NOTE 2:

- 间距 (Pitch): 7.50mm
- 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
- 绝缘长度: 7~8mm
Striping Length: 7~8mm
- 符合RoHS环保要求
- 符合 RoHS 环保要求
- 额定扭矩: 0.4N.m 3.64 [Dn, In]
(Rated torque): 0.4N.m 3.64 [Dn, In]
- 未标注公差按
Unlaminated tolerances






间距 (Pitch) Pitch range in mm	标称尺寸公差 (Nominal dimension range in mm)	公差 (Tolerance)
≤6	6 ~ 10	±0.1/±0.10
10 ~ 24	≤30	±0.1/±0.10
30 ~ 60	60 ~ 100	±0.15/±0.15
60 ~ 100	100 ~ 150	±0.2/±0.20
100 ~ 150	150 ~ 200	±0.25/±0.25
200 ~ 250	250 ~ 300	±0.3/±0.30

订购方式 (HOW TO ORDER)

MX2EDGK - 7.50 - P - 0 - 0 - 0 - 0 - 0

型号	间距	极数	颜色	客户型号
Series No.	Pitch	Poles	Color	Customer Request

- 1. 单间距**
Single Pitch
2. 双间距
Double Pitch
- 颜色 (Color)**
1. 灰色 (Grey) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)

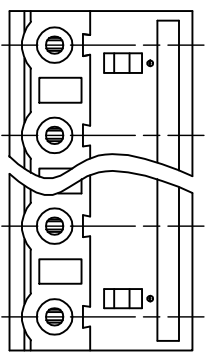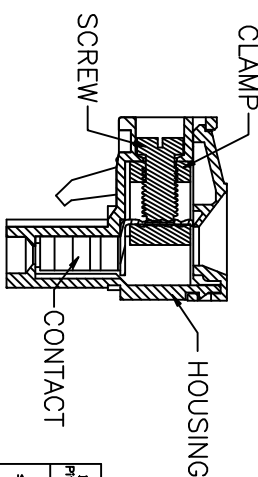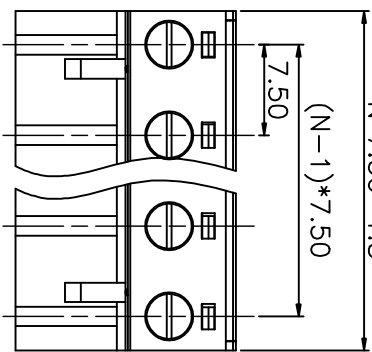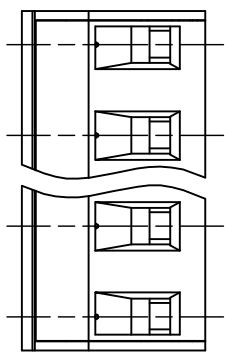

4 (Cage) 方盒 (Copper alloy)	(Copper alloy)	(Ni plated) 镀镍	PART NO.:	/
3 (Contact) 触点 (Copper alloy)	(Copper alloy)	(Ni plated) 镀镍	APPD:	/
2 (Screw) 螺丝 (Steel)	(Steel)	(Zn plated) 镀锌	CHKD:	/
1 (Housing) 罩件 PA66	PA66	UL94V-0	DRFT:	/
ITEM	NAME OF PART	MATERIAL	NOTES	

宁波迈科思电子科技有限公司
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD

型号	MX2EDGK-7.50-XXP
系列	MX2EDGK-7.50
图号	MX2EDGK750001
页码	1/1
比例	1:1