
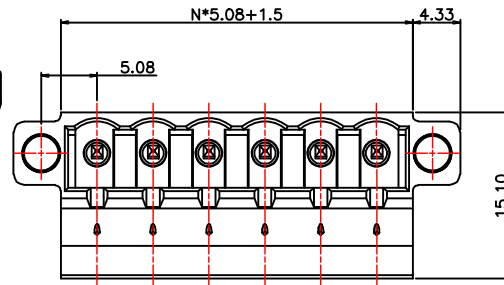


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

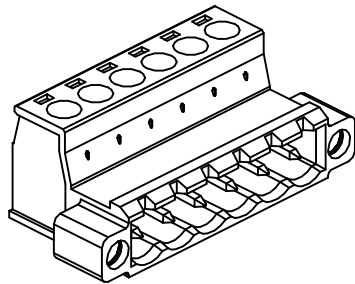

SPECIFICATION

MATERIAL




Housing:PA66,UL94V-0
 Screw:M3 Steel,Zinc Plated
 Terminal:Phosphor Bronze,Tin Plated
 Clamp:Brass,Ni Plated

ELECTRICAL



Rated voltage:300V
 Rated current: 15A
 Wire Range(AWG/MM²):24-12AWG/0.2-2.5MM²
 Withstanding voltage: AC4000V/ 1Min

MECHANICAL

Torque:0.4Nm(3.5Lb-In.)
 Strip Length:7mm
 Operating Temperature:-40°C~+105°C

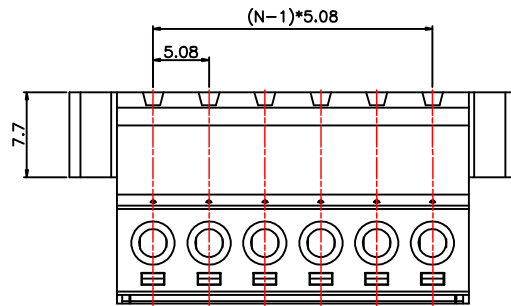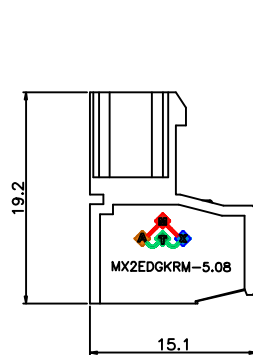

订购方式/HOW TO ORDER

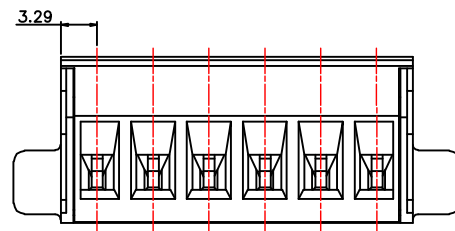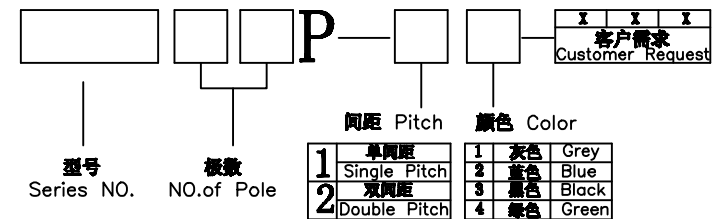

N=No. of contacts

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表 TOLERANCE UNLESS OTHERWISE				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX2EDGKRM-5.08
.X	±0.20	.X°	±2°	角法 VIEW	第一角	设计 DESIGN	顾兴伟	产品料号 PART NO.	MX2EDGKRM-5.08
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	MX2EDGKRM-5.08-A0
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD	