
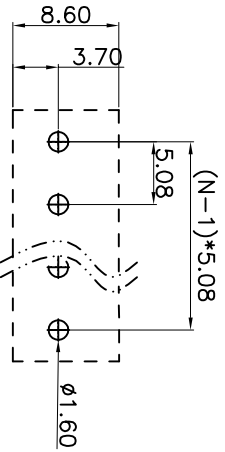

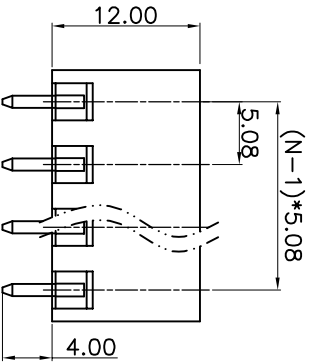



REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE



PCB LAYOUT

N=No. of contacts

- NOTE 1:
UL标准 (UL Standard)
1. 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A
2. 功频耐压: AC1600V/Min
Withstanding Voltage: AC1600V/Min
IEC标准 (IEC Standard)
1. 额定电压与电流: 320V/20A
Rated voltage/Rated current: 320V/20A
- NOTE 2:
1. 间距 (Pitch): 5.08mm
2. 使用温度范围: -40℃~+105℃
Operating temperature: -40℃~+105℃
3. 符合RoSH环保要求
RoHS Compliance
5. 未标注公差表
Undimensioned tolerances

矩形公差 (mm)	其他尺寸公差 (mm)	公差
Pitch range in mm	Nominal dimension range in mm	±
≤6	> 60	0.1/10
10 ~ 24	≤30	>
≤30	60	150
±0.15	±0.20	±0.30
±0.20	±0.30	±0.70
±1.00	±1.00	±1

订购方式 (HOW TO ORDER)
MX2EDGV-5.08-□□P-□□□□□□□□□□
型号 间距 极数 客户型号
Series NO. Pitch Poles Customer Request

- 颜色 (Color)
1. 灰色 (Gray) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)
1. 单间距 Single Pitch
2. 双间距 Double Pitch

PART NO.: /		APPD: /		CHKD: /		DRFT: /		THIED ANGLE PROJECTION	
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD		型号 MX2EDGV-5.08-XXP		系列 MX2EDGV-5.08		图号 MX2EDGV508001		页码 1/1	
								比例 1:1	

2	(Pin header) 焊脚 (Copper alloy) 铜合金	(Sn plated) 镀锡	NOTES
1	(Housing) 塑件 PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	

A 8 7 6 5 4 3 2 1