
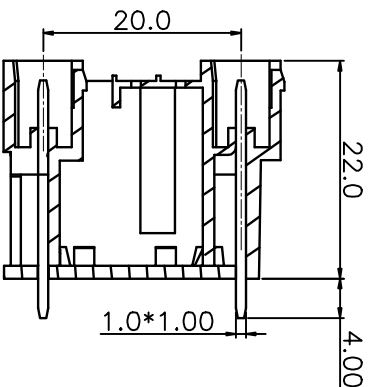


REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE

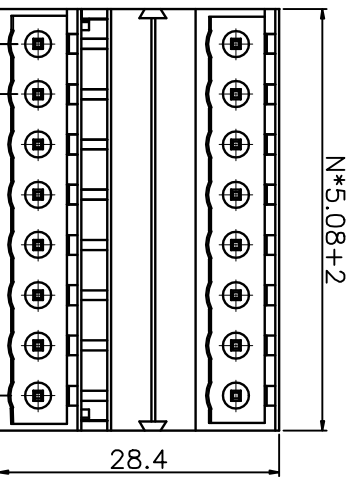

NOTE 1:
UL标准 (UL Standard)

1. 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A
2. 功耐耐压: AC1600V/Min
Withstanding Voltage: AC1600V/Min

IEC标准 (IEC Standard)

1. 额定电压与电流: 320V/10A
Rated voltage/Rated current: 320V/10A

NOTE 2:

1. 间距 (Pitch): 5.08mm
2. 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
3. 符合RoHS环保要求
RoHS Compliance
4. 未标注公差表
Undimensioned tolerances


额定公差 (mm)	实际公差 (mm)	公差带
Pitch range in mm	Nominal dimension range in mm	±T
≤6	6 ~ 10	±0.1/10
~ 10	10 ~ 24	±0.15
~ 24	24 ~ 30	±0.20
~ 30	30 ~ 60	±0.30
~ 60	60 ~ 100	±0.50
~ 100	100 ~ 150	±0.70
~ 150	150 ~ 300	±1.00
~ 300	300 ~ 600	±1.50
~ 600	600 ~ 1200	±2.00
~ 1200	1200 ~ 2500	±3.00
~ 2500	2500 ~ 5000	±4.00
~ 5000	5000 ~ 10000	±5.00
~ 10000	10000 ~ 20000	±6.00
~ 20000	20000 ~ 50000	±8.00
~ 50000	50000 ~ 100000	±10.00
~ 100000	100000 ~ 200000	±12.00
~ 200000	200000 ~ 500000	±15.00
~ 500000	500000 ~ 1000000	±20.00
~ 1000000	1000000 ~ 2000000	±25.00
~ 2000000	2000000 ~ 5000000	±30.00
~ 5000000	5000000 ~ 10000000	±35.00
~ 10000000	10000000 ~ 20000000	±40.00
~ 20000000	20000000 ~ 50000000	±50.00
~ 50000000	50000000 ~ 100000000	±60.00
~ 100000000	100000000 ~ 200000000	±70.00
~ 200000000	200000000 ~ 500000000	±80.00
~ 500000000	500000000 ~ 1000000000	±100.00
~ 1000000000	1000000000 ~ 2000000000	±120.00
~ 2000000000	2000000000 ~ 5000000000	±150.00
~ 5000000000	5000000000 ~ 10000000000	±200.00
~ 10000000000	10000000000 ~ 20000000000	±250.00
~ 20000000000	20000000000 ~ 50000000000	±300.00
~ 50000000000	50000000000 ~ 100000000000	±400.00
~ 100000000000	100000000000 ~ 200000000000	±500.00
~ 200000000000	200000000000 ~ 500000000000	±600.00
~ 500000000000	500000000000 ~ 1000000000000	±800.00
~ 1000000000000	1000000000000 ~ 2000000000000	±1000.00
~ 2000000000000	2000000000000 ~ 5000000000000	±1200.00
~ 5000000000000	5000000000000 ~ 10000000000000	±1500.00
~ 10000000000000	10000000000000 ~ 20000000000000	±2000.00
~ 20000000000000	20000000000000 ~ 50000000000000	±2500.00
~ 50000000000000	50000000000000 ~ 100000000000000	±3000.00
~ 100000000000000	100000000000000 ~ 200000000000000	±4000.00
~ 200000000000000	200000000000000 ~ 500000000000000	±5000.00
~ 500000000000000	500000000000000 ~ 1000000000000000	±6000.00
~ 1000000000000000	1000000000000000 ~ 2000000000000000	±8000.00
~ 2000000000000000	2000000000000000 ~ 5000000000000000	±10000.00
~ 5000000000000000	5000000000000000 ~ 10000000000000000	±12000.00
~ 10000000000000000	10000000000000000 ~ 20000000000000000	±15000.00
~ 20000000000000000	20000000000000000 ~ 50000000000000000	±20000.00
~ 50000000000000000	50000000000000000 ~ 100000000000000000	±25000.00
~ 100000000000000000	100000000000000000 ~ 200000000000000000	±30000.00
~ 200000000000000000	200000000000000000 ~ 500000000000000000	±40000.00
~ 500000000000000000	500000000000000000 ~ 1000000000000000000	±50000.00
~ 1000000000000000000	1000000000000000000 ~ 2000000000000000000	±60000.00
~ 2000000000000000000	2000000000000000000 ~ 5000000000000000000	±80000.00
~ 5000000000000000000	5000000000000000000 ~ 10000000000000000000	±100000.00

订购方式 (HOW TO ORDER)

MX2EDGVH - 5.08 - □P - □ - □ - □□□□

型号 间距 封装 客户型号
Series NO. Pitch Poles Customer Request

1. 单间距 Single Pitch
2. 双间距 Double Pitch
1. 灰色 (Grey) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)

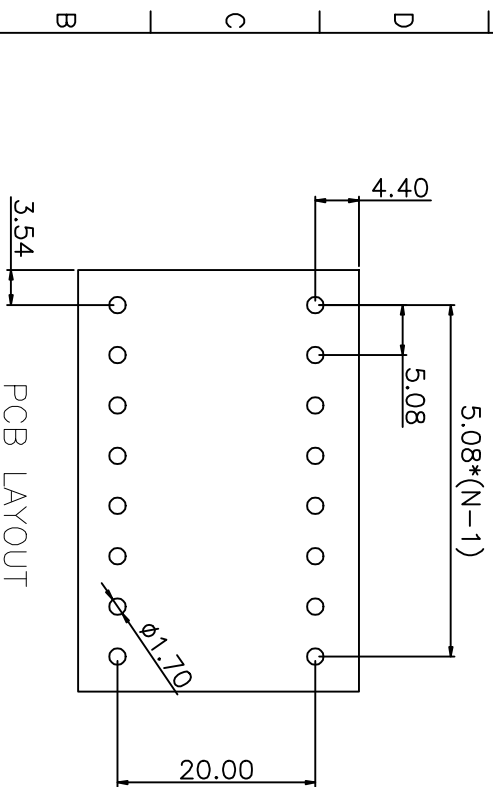

ITEM	NAME OF PART	MATERIAL	NOTES
1	(Housing) 器件	PA66	UL94V-0
2	(Contact) 触点	(Copper alloy) 铜合金	

PART NO.: /		THIRD ANGLE PROJECTION	
APPD: /	CHKD: /	DRFT: /	DRFT: /
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD		型号	页码
宁波迈科思电子科技有限公司		MX2EDGVH-5.08-XXP	1/1
		系列	比例
		MX2EDGVH-5.08	1:1
		图号	
		MX2EDGVH508001	