

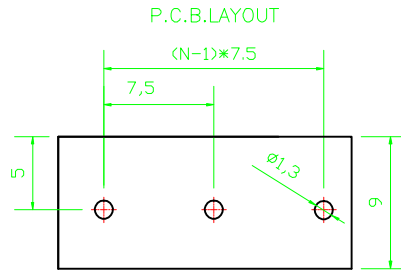
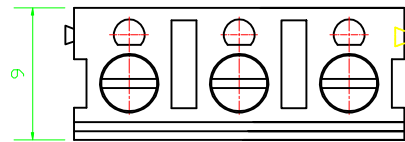


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

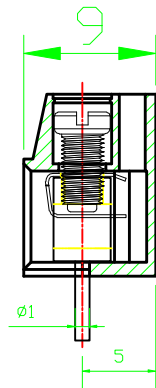

N=Number of contacts

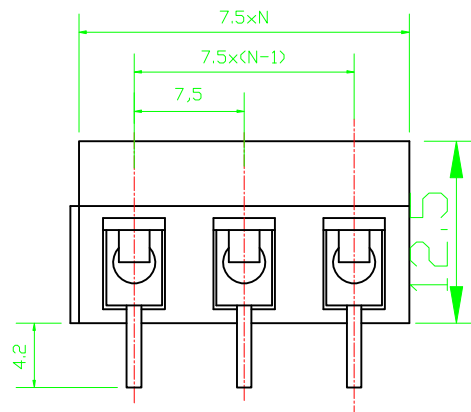


N=No.of contacts

·材质及电镀(Material)  
 螺丝(Screw):M3,钢,镀锌(steel, zinc Plated)  
 弹片(Wire Protector):磷青铜,镀镍或不锈钢  
 (Phosphor bronze, Ni plated or stainless steel)  
 焊针(Pin holder):黄铜,镀锡(Brass,Tin plated)  
 壳体(Housing): PBT, UL94V-0

·电气性能(Electrical)  
 额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 12A  
 接触电阻(Contact Resistance): 20mΩ  
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V  
 耐电压(Withstanding Voltage): AC1500V/1Min  
 使用线径(Wire Range): 22-14AWG 2.5mm<sup>2</sup>

·机械性能(Mechanical)  
 温度范围(Temperature Range): -30℃~+120℃  
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)  
 扭矩(Torque): 0.5Nm(4.5lb.in)  
 剥线长度(Strip length): 4.5-5mm

### 订购方式/HOW TO ORDER

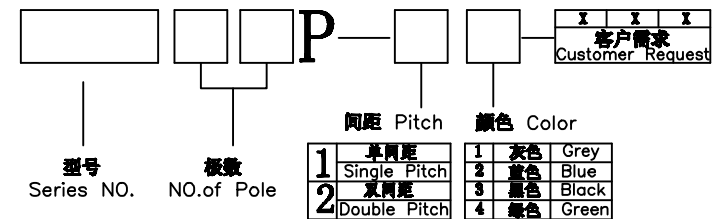

CONTACT WITH US:  
 TEL:+86-574-63505128 FAX:+86-574-63532183  
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表				宁波迈科思电子科技有限公司			
TOLERANCE UNLESS OTHERWISE				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD			
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅
.X	±0.20	.X°	±2°	UNITS		DRAWING	
.XX	±0.15	.XX°	±1°	角法	第一角	设计	顾兴伟
.XXX	±0.02	.XXX°	±0.5°	VIEW		DESIGN	
日期	2012.07.10	比例	1:1	SCALE		审核	
DATE		版本	A0	VER		核准	
		产品名称	MX300-7.5			产品名称	MX300-7.5
		产品料号	MX300-7.5			PART NO.	MX300-7.5
		图号	MX300-7.5-0A			DRAW NO.	MX300-7.5-0A