

REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE

NOTE 1:
UL标准 (UL Standard)

- 额定电压与电流: 300V/10A
Rated voltage/Rated current: 300V/10A
- 绝缘耐压: AC2000V/Min
Withstanding Voltage: AC2000V/Min
- 线径范围: 22~14AWG
Wire range: 22~14AWG

IEC标准 (IEC Standard)

- 额定电压与电流: 250V/24A
Rated voltage/Rated current: 250V/24A
- 线径范围: 2.5mm²
Wire range: 2.5mm²

NOTE 2:

- 间距 (Pitch): 5.00mm
- 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
- 引线长度: 6~7mm
Stripping length: 6~7mm
- 符合RoHS环保要求
RoHS Compliance
- 额定扭矩: 0.25N.m 2.6 [Lx, In]
(Rated torque): 0.25N.m 2.6 [Lx, In]
- 未标注公差按
Unlabeled tolerance

间距公差 (mm) Pitch range in mm	标称公差 (mm) Nominal dimension range in mm	公差等级 Tolerance Class						
≤6	~ 10	~ 30	60	100	150	≥ 150	0.1/1.0	
10	~ 24	~ 50	60	100	150	≥ 150	0.1/1.0	
±0.15	±0.20	±0.30	±0.20	±0.30	±0.20	±0.70	±1.00	A*




订购方式 (HOW TO ORDER)

MX300V-5.00-□□-□□-□□□□□□□□□□

型号 间距 极数
Series No. Pitch Poles

客户型号
Customer Request

- 单间距 Single Pitch
- 双间距 Double Pitch
- 灰色 (Grey)
- 蓝色 (Blue)
- 黑色 (Black)
- 绿色 (Green)
- 黄色 (Orange)
- 红色 (Red)
- 黄色 (Yellow)
- 白色 (White)
- 透明 (Transparent)

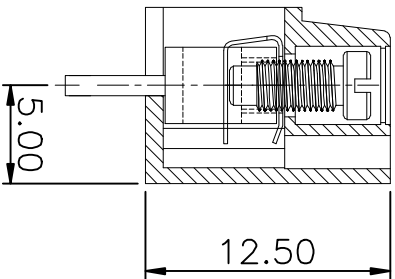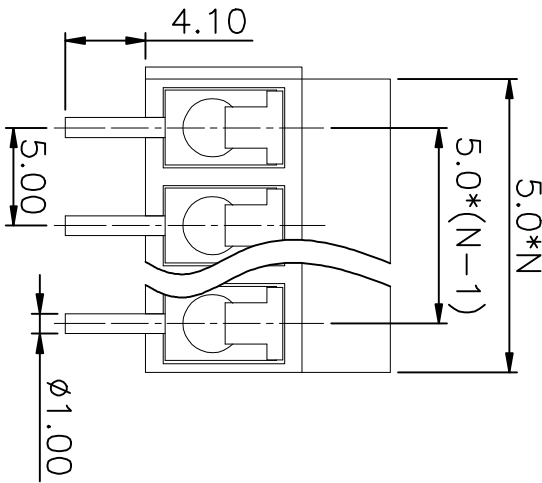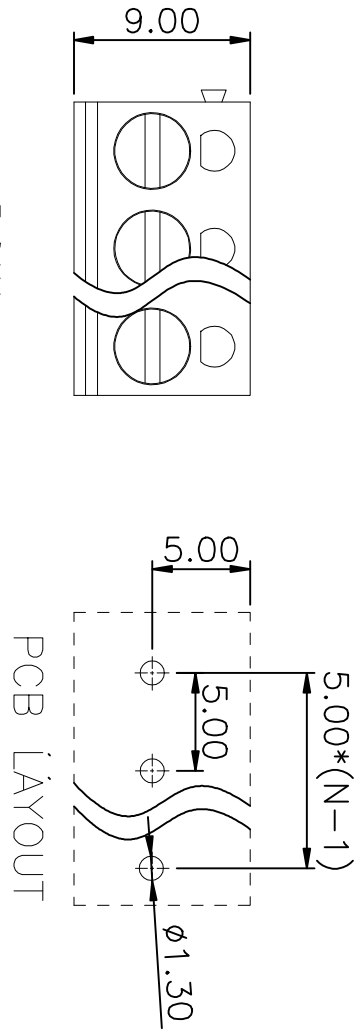

ITEM	NAME OF PART	MATERIAL	NOTES
4	(Shrapnel)弹片	Stainless steel/不锈钢	
3	(Contact)触点	(Copper alloy)铜合金	
2	(Screw)螺丝	(Steel)钢	(Zn plated)镀锌
1	(Housing)罩件	PBT	

PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/

THIRD ANGLE PROJECTION	
系列	MX300V-5.00-XXP
型号	MX300-5.00
图号	MX300S00001
页码	1/1
比例	1:1

宁波迈科思电子科技有限公司
 NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD