




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

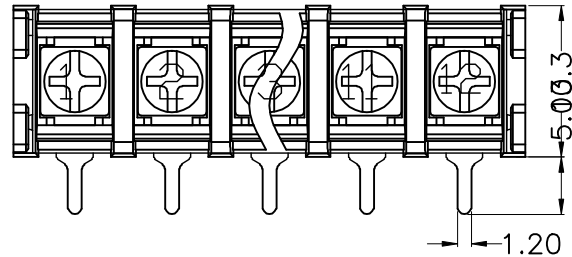


·材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)
 螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 20A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min

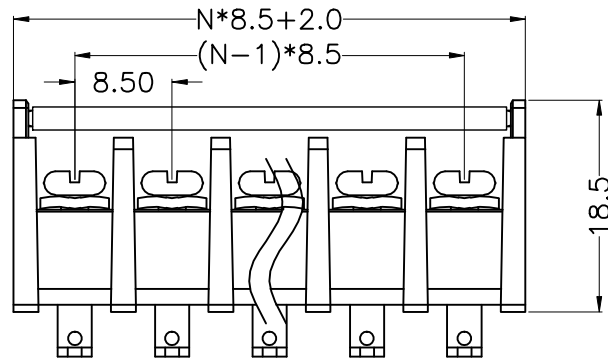

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 适用线径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

订购方式/HOW TO ORDER

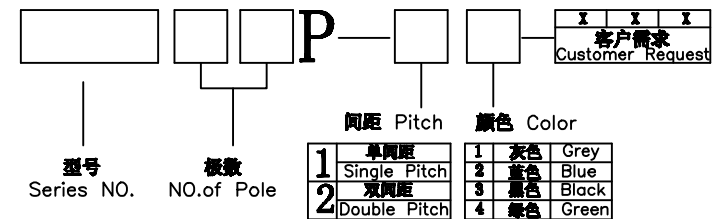

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
TOLERANCE UNLESS OTHERWISE				单位	制图	陈冬梅	产品名称	MX35RG-8.50	
X.	±0.25	X*	±5°	UNITS	mm	陈冬梅	MX35RG-8.50		
.X	±0.20	.X*	±2°	角法	设计	顾兴伟	MX35RG-8.50		
.XX	±0.15	.XX*	±1°	VIEW	设计		MX35RG-8.50		
.XXX	±0.02	.XXX*	±0.5°	SCALE	1:1		MX35RG-8.50		
日期	2012.07.10	版本	A0	DATE	APPD		图号	MX35RG-8.5-0A	