




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN


·材质及电镀 (Material)  
 基板 (Base): A2, 铜, 铁粉 (steel, zinc Plating)  
 焊片 (Weld Protection): 镀锌钢, 铁镀或不镀铬  
 (Phosphor bronze, Ni plated or stainless steel)  
 焊片 (Pin Insulator): 环氧树脂 (Epoxy, Tin plated)  
 插件 (Mounting): PAGES, UL94V-0

·电气性能 (Electrical)  
 额定电压 (Rated Voltage): 300V  
 额定电流 (Rated Current): 18A  
 接触电阻 (Contact Resistance): 2mΩ  
 绝缘电阻 (Insulation Resistance): 500MΩ/1000V  
 耐电压 (Withstanding Voltage): AC1500V/1Min  
 使用线径 (Wire Range): 24-18AWG 1mm<sup>2</sup>

·机械性能 (Mechanical)  
 温度范围 (Temperature Range): -40℃~+105℃  
 瞬时温度 (MAX. Soldering): +250℃, 5秒 (5 Seconds)  
 拔距 (Tongue): 0.22mm (1.7mil)  
 引脚长度 (Strip length): 4.5-5mm



订购方式/HOW TO ORDER

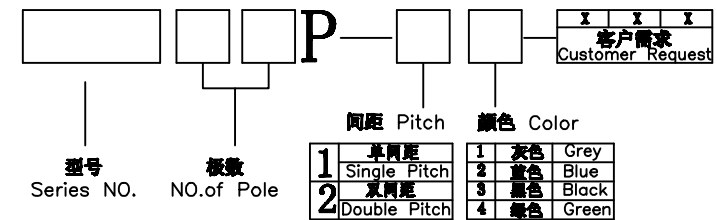

CONTACT WITH US:  
 TEL:+86-574-63505128 FAX:+86-574-63532183  
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No. of contacts

公差一览表				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD			
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅
.X	±0.20	.X°	±2°	UNITS		DRAWING	
.XX	±0.15	.XX°	±1°	角法	⊕ ⊖	设计	顾兴伟
.XXX	±0.02	.XXX°	±0.5°	VIEW		DESIGN	
日期	2012. 07. 10	比例	1:1	SCALE		审核	
DATE		版本	A0	VER		核准	
		产品名称	MX396R-3.96		产品型号	MX396R-3.96	
		TITLE			图号	MX396R-3.96-0A	
		PART NO.			DRAW NO.		