
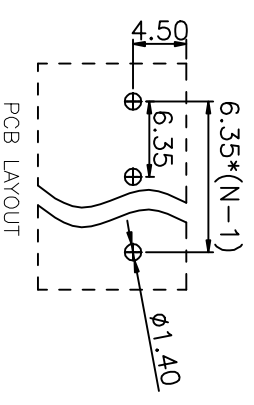
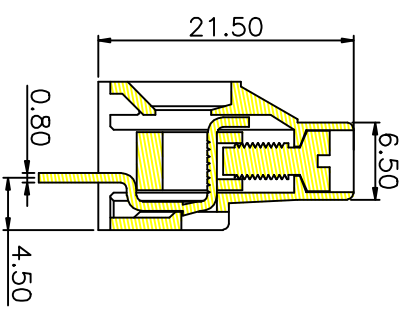
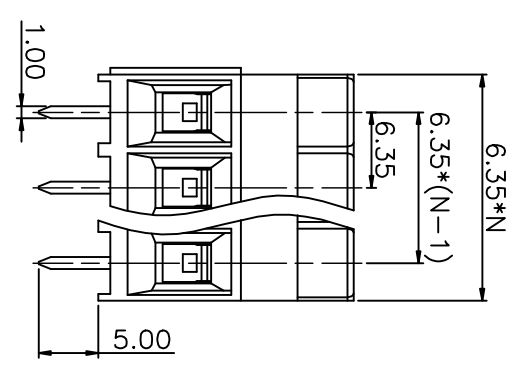


REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE



**NOTE 1:**  
**UL标准 (UL Standard)**  
 1. 额定电压与电流: 300V/30A  
 Rated voltage/Rated current: 300V/30A  
 2. 峰值耐压: AC2500V/Min  
 3. 持续耐压: AC2000V/Min  
 Withstanding Voltage: AC2000V/Min  
 4. 纹流范围: 28~10Ams  
 Ripple range: 28~10Ams  
**IEC标准 (IEC Standard)**  
 1. 额定电压与电流: 450V/24A  
 Rated voltage/Rated current: 450V/24A  
 2. 纹流范围: 1.5~4.0ms<sup>2</sup>  
 Ripple range: 1.5~4.0ms<sup>2</sup>

**NOTE 2:**  
 1. 间距 (Pitch): 6.35mm  
 2. 使用温度范围: -40°C~+105°C  
 Operating temperature: -40°C~+105°C  
 3. 引线长度: 8mm  
 Striping length: 8mm  
 4. 符合RoHS环保要求  
 RoHS Compliance  
 5. 额定扭矩: 0.8N.m 4.48 [Inch. In]  
 (Rated torque): 0.8N.m 4.48 [Inch. In]  
 6. 未标注公差按  
 Unlabeled tolerance

间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)	间距/线宽 (mm)
≤6	6	10	30	60	100	150	> 150
~	~	~	~	~	~	~	~
10	24	24	60	100	150	150	> 150
±0.15	±0.20	±0.20	±0.20	±0.30	±0.30	±0.70	±1.00
							±1°

**订购方式 (HOW TO ORDER)**  
**MX635 - 6.35 - □□□□ - □□□□□□**

型号 间距 极数  
 Series No. Pitch Poles

颜色 (Color)  
 1. 灰色 (Grey) 2. 蓝色 (Blue)  
 3. 黑色 (Black) 4. 绿色 (Green)  
 5. 橙色 (Orange) 6. 红色 (Red)  
 7. 黄色 (Yellow) 8. 白色 (White)  
 9. 透明 (Transparent)

客户型号  
 Customer Request

ITEM	NAME OF PART	MATERIAL	NOTES
4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍
3	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡
2	(Screw) 螺丝	(Steel) 钢	(Ni plated) 镀镍
1	(Housing) 罩件	PA66	UL94V-0

PART NO.:		THIRD ANGLE PROJECTION	
APPD:	/		
CHKD:	/		
DRFT:	/		

**宁波迈科思电子科技有限公司**  
 NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD

型号	系列	图号	页码	比例
MX635-6.35-XXP	MX635-6.35	MX635635001	1/1	1:1