



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

- 材质及电镀(Material)
 螺丝(Screw):M3,钢,镀锌(steel, zinc Plated)
 触点(Contact):黄铜,镀镍(Bronze, Ni plated)
 塑件(Housing): PA66, UL94V-0
- 电气性能(Electrical)
 额定电压(Rated Voltage): 450V
 额定电流(Rated Current): 7.5A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC2500V/1Min
 使用线径(Wire Range): 0.5- 2.5mm²
- 机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 扭矩(Torque): 0.5Nm(4.5lb.in)
 剥线长度(Strip length): 6-7mm

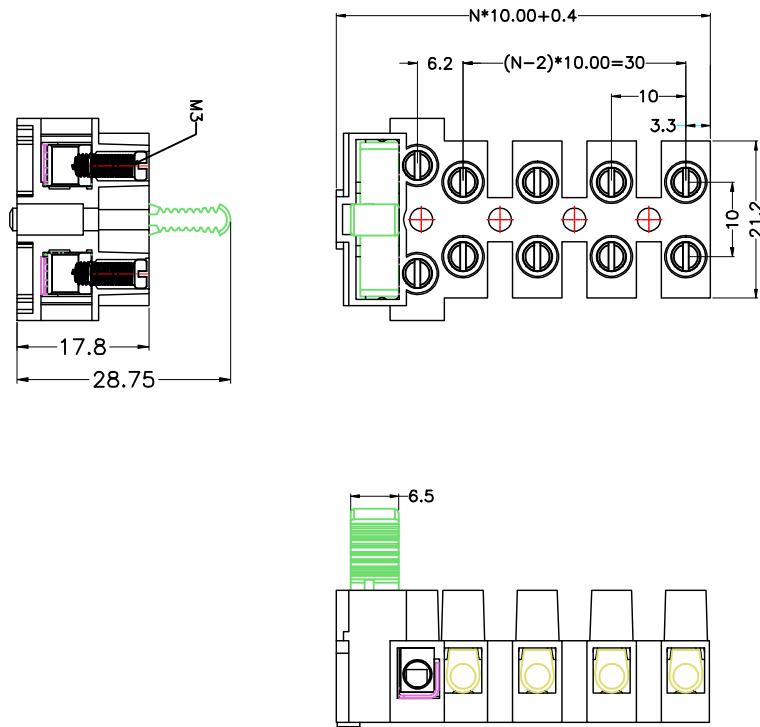

订购方式/HOW TO ORDER

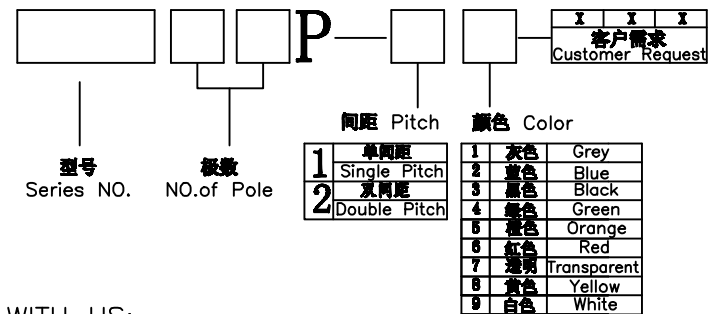

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MX801-1
.X	±0.20	.X°	±2°	角法	设计	顾兴伟	图号		
.XX	±0.15	.XX°	±1°	比例	1:1	审核		产品料号	MX801-1
.XXX	±0.02	.XXX°	±0.5°	日期	2012.07.10	版本	A0	图号	MX801-1-A0
				DATE	VER	APPD		DRAW NO.	