




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN


·材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.7t 镀锡(Brass, Tin plated)
 螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 20A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 适用径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

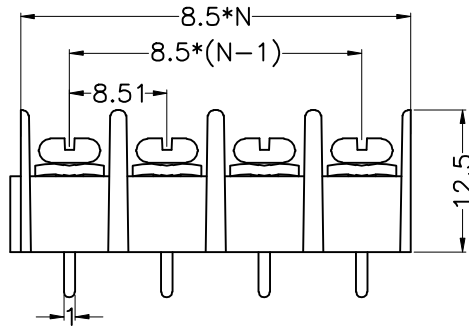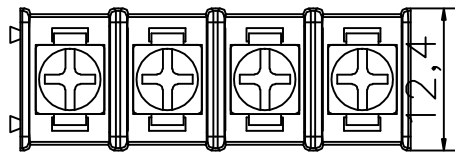

订购方式/HOW TO ORDER

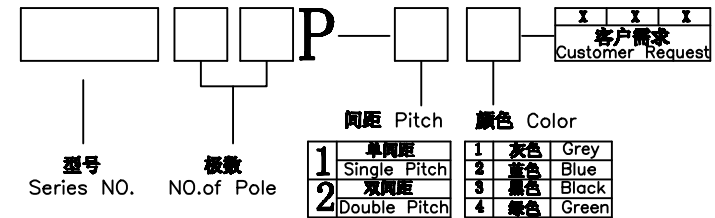

CONTACT WITH US:
 TEL: +86-574-63505128 FAX: +86-574-63532183
 E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

公差一览表				宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE				单位	制图	陈冬梅	产品名称
X.	±0.25	X°	±5°	UNIT	mm	陈冬梅	MX8500-8.50
.X	±0.20	.X°	±2°	角法	设计	顾兴伟	MX8500-8.50
.XX	±0.15	.XX°	±1°	VIEW	设计		产品编号
.XXX	±0.02	.XXX°	±0.5°	SCALE	1:1		PART NO.
日期	2012.07.10	版本	A0	核准	APPD		图号
DATE	2012.07.10	VER	A0	APPD			DRAW NO.