
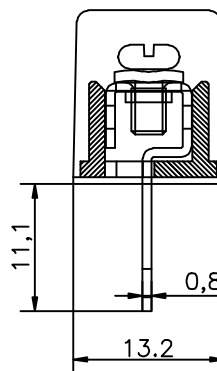
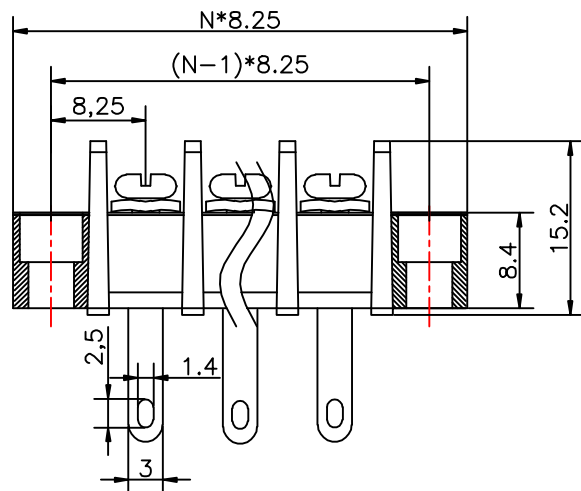


RoHS Compliant

Customer Drawing

| REV. | ECN NO. | DESCRIPTION | DATE | DESIGN |
|------|---------|-------------|------|--------|
|      |         |             |      |        |

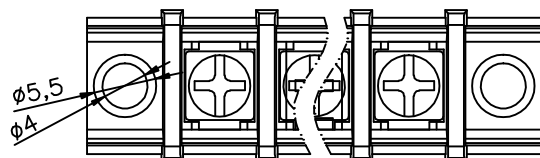

## ·材质及电镀(Material)

塑件(Housing): PA66, UL94V-0

端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)

螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)

## ·电气性能(Electrical)

额定电压(Rated Voltage): 300V

额定电流(Rated Current): 20A

绝缘电阻(Insulation Resistance): 500M $\Omega$ /DC500V

耐电压(Withstanding Voltage): AC2000V/Min


## ·机械性能(Mechanical)

温度范围(Temperature Range): -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

适用线径(Wire Range): 22-14AWG

最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

## 订购方式/HOW TO ORDER

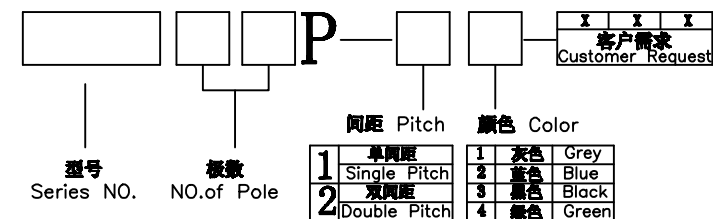

CONTACT WITH US:

TEL: +86-574-63505128 FAX: +86-574-63532183

E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

| 公差一览表                      |            |        |                   | 宁波迈科思电子科技有限公司                            |                  |               |     |
|----------------------------|------------|--------|-------------------|------------------------------------------|------------------|---------------|-----|
| TOLERANCE UNLESS OTHERWISE |            |        |                   | NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD |                  |               |     |
| X.                         | $\pm 0.25$ | X*.    | $\pm 5^{\circ}$   | 单位<br>UNITS                              | mm               | 制图<br>DRAWING | 陈冬梅 |
| .X                         | $\pm 0.20$ | .X*.   | $\pm 2^{\circ}$   | 角法<br>VIEW                               | $\phi$ $\square$ | 设计<br>DESIGN  | 顾兴伟 |
| .XX                        | $\pm 0.15$ | .XX*.  | $\pm 1^{\circ}$   | 比例<br>SCALE                              | 1:1              | 审核<br>CHKD    |     |
| .XXX                       | $\pm 0.02$ | .XXX*. | $\pm 0.5^{\circ}$ | 版本<br>VER                                | A0               | 核准<br>APPD    |     |
| 日期<br>DATE                 | 2012.07.10 |        |                   | 产品名称<br>TITLE                            | MX30H-8.25       |               |     |
|                            |            |        |                   | 产品料号<br>PART NO.                         | MX30H-8.25       |               |     |
|                            |            |        |                   | 图号<br>DRAW NO.                           | MX30H-8.25-0A    |               |     |